

---

# Cycle

## « Analyse de données de séquençage à haut-débit »

### Module 1/5: Analyses ADN

8 et 9 Mars 2023

— Pierre Pericard (Bilille - PLBS) —  
Hélène Touzet (Bonsai - CRISAL)  
Sarah Guinchard (Bilille - PLBS)

[pierre.pericard@univ-lille.fr](mailto:pierre.pericard@univ-lille.fr), [helene.touzet@univ-lille.fr](mailto:helene.touzet@univ-lille.fr)

---

# Jour 1 :

## Matin

- Cours
  - NGS Introduction
  - Reads Quality Control + Cleaning
- TP FastQC + multiqc + cleaning  
<https://training.galaxyproject.org/training-material/topics/sequence-analysis/tutorials/quality-control/tutorial.html>

## Pause midi

## Après-midi

- Cours
  - Reads mapping on reference
- TP Mapping  
<https://training.galaxyproject.org/training-material/topics/sequence-analysis/tutorials/mapping/tutorial.html>

# Jour 2 :

## Matin

- TP Mapping
  - Deep dive into Bowtie2 alignment parameters
- Cours
  - Genome assembly

## Pause midi

## Après-midi

- TP Genome assembly
  - <https://training.galaxyproject.org/training-material/topics/assembly/tutorials/debruijn-graph-assembly/tutorial.html>
  - <https://training.galaxyproject.org/training-material/topics/assembly/tutorials/assembly-quality-control/tutorial.html>

# Jour 1 :


- NGS Introduction

- What is NGS?
- Sequencers
- Applications
- NGS workflow
- Output data

# What is Next-Generation Sequencing (NGS)?

“Next-generation sequencing (NGS), also known as high-throughput sequencing, is the catch-all term used to describe a number of different modern sequencing technologies. These technologies allow for sequencing of DNA and RNA much more quickly and cheaply than the previously used Sanger sequencing, and as such revolutionised the study of genomics and molecular biology”


x **Gb**/run  
~ 0.4 \$/Mb  
~ 3 Day/run  
read length  
= 50~200 bp

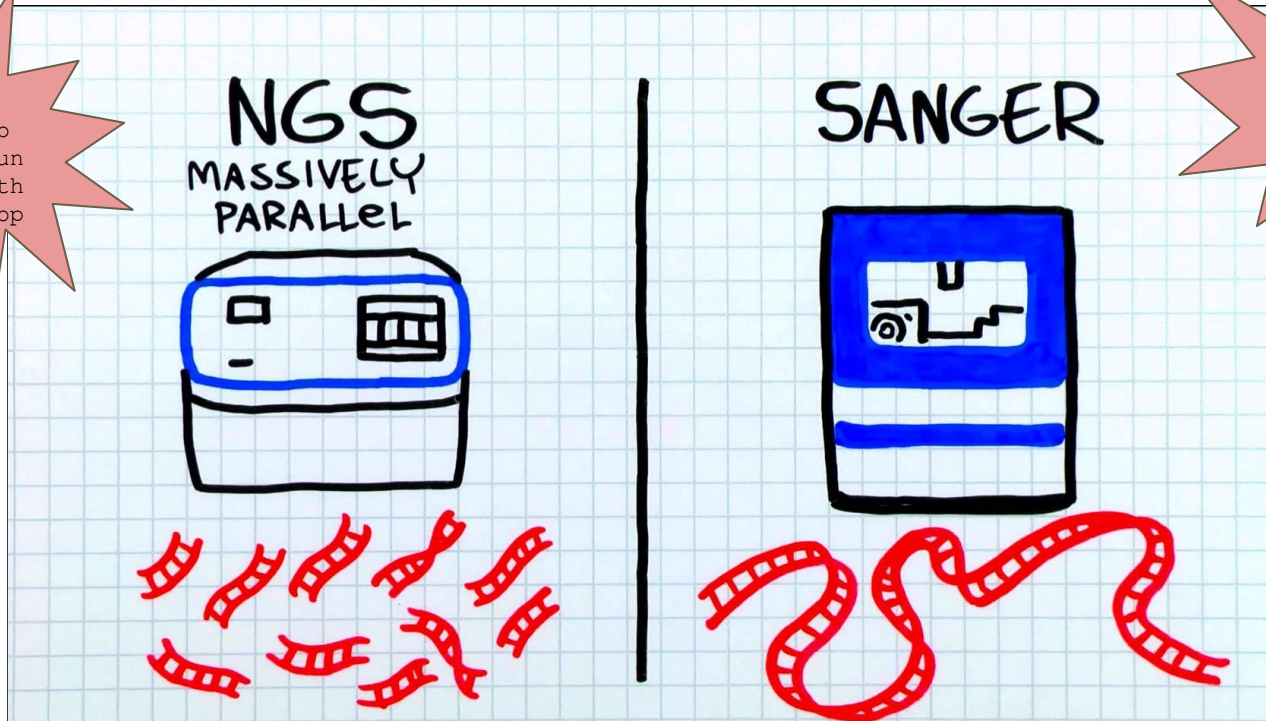

x **Kb**/run  
~ 5000 \$/Mb  
~ 1 Day/run  
read length  
= 700 bp

The Human Genome Project was a **13-year-long** & cost **\$5 billion**

# What is Next-Generation Sequencing (NGS)?

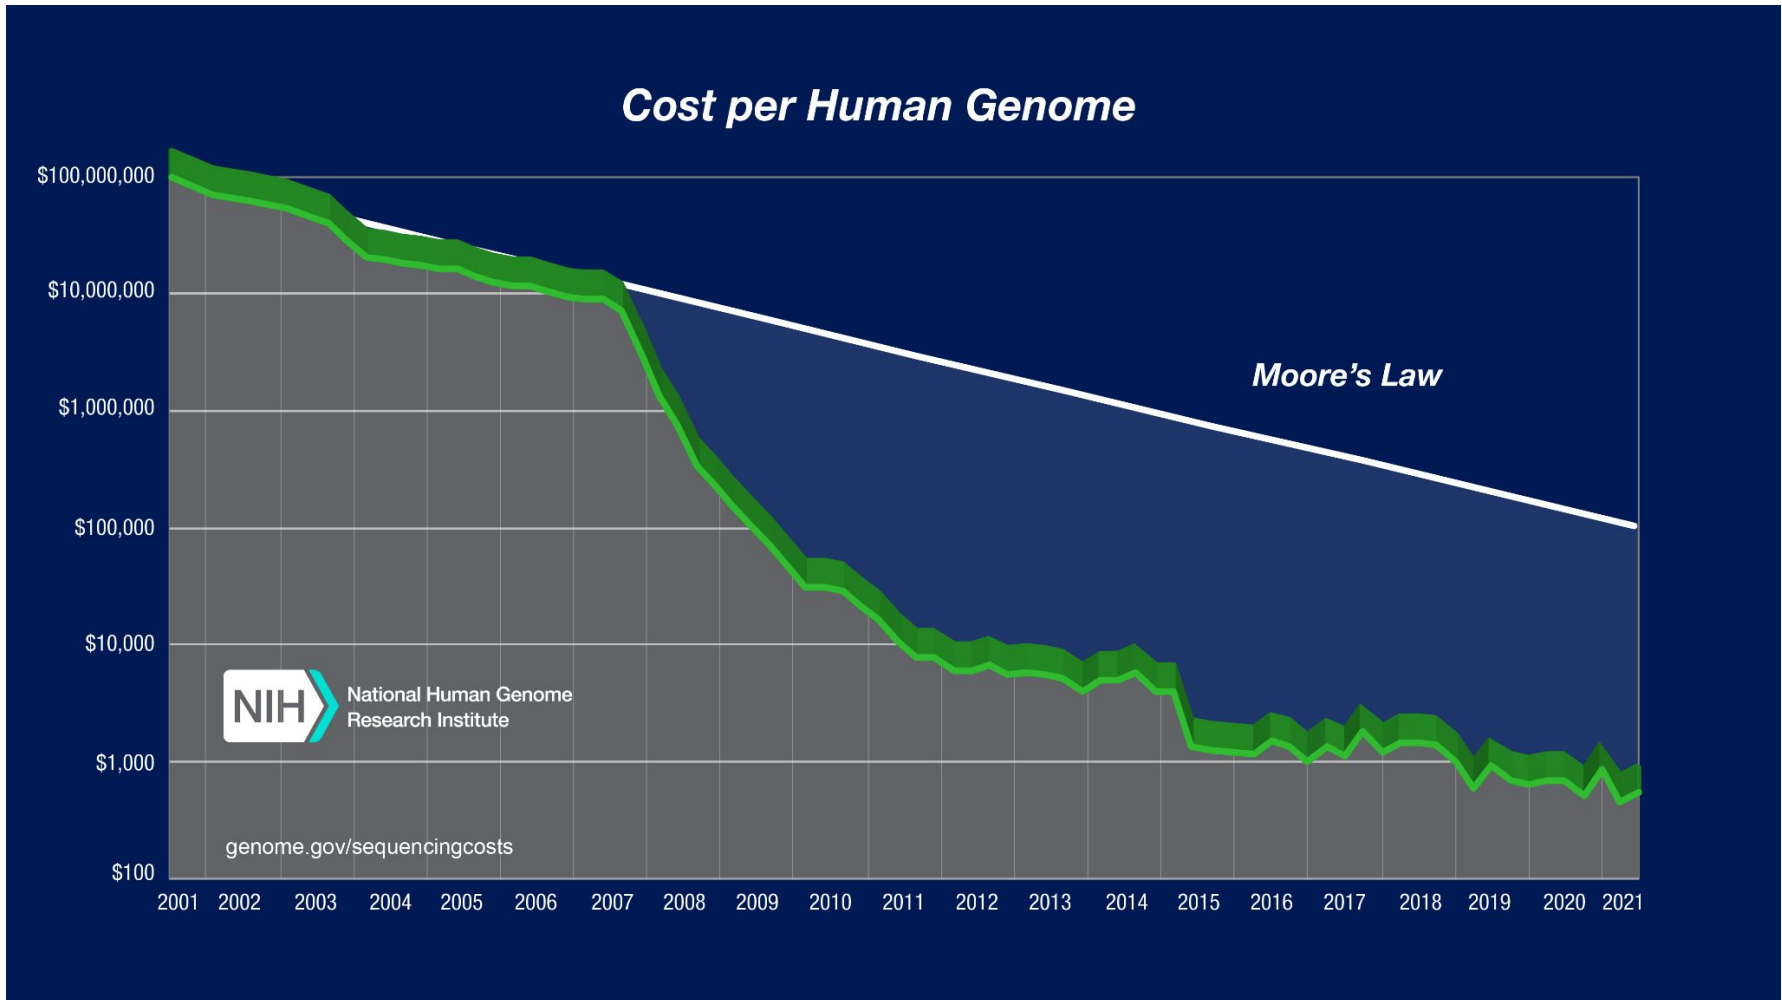

# What is Next-Generation Sequencing (NGS)?

## Illumina sequencing

Illumina sequencing works by simultaneously identifying DNA bases, as each base emits a unique fluorescent signal, and adding them to a nucleic acid chain

## Ion Torrent: Proton / PGM sequencing (thermofisher)

Ion Torrent sequencing measures the direct release of H<sup>+</sup> (protons) from the incorporation of individual bases by DNA polymerase and therefore differs from the previous two methods as it does not measure light.

illumina®

ThermoFisher  
SCIENTIFIC

# What is Next-Generation Sequencing (NGS)?

## Illumina sequencing

Illumina sequencing works by simultaneously identifying DNA bases, as each base emits a unique fluorescent signal, and adding them to a nucleic acid chain

## Ion Torrent: Proton / PGM sequencing (thermofisher)

Ion Torrent sequencing measures the direct release of H<sup>+</sup> (protons) from the incorporation of individual bases by DNA polymerase and therefore differs from the previous two methods as it does not measure light.






## MGI sequencing (BGI group)





# Sequencers – Illumina



	Benchtop Sequencers		Production-Scale Sequencers		
					
	iSeq 100	MiniSeq	MiSeq Series	NextSeq 550 Series	NextSeq 1000 & 2000
Popular Applications & Methods	Key Application	Key Application	Key Application	Key Application	Key Application
Large Whole-Genome Sequencing (human, plant, animal)					
Small Whole-Genome Sequencing (microbe, virus)	●	●	●	●	●
Exome & Large Panel Sequencing (enrichment-based)				●	●
Targeted Gene Sequencing (amplicon-based, gene panel)	●	●	●	●	●
Single-Cell Profiling (scRNA-Seq, scDNA-Seq, oligo tagging assays)				●	●
Transcriptome Sequencing (total RNA-Seq, mRNA-Seq, gene expression profiling)				●	●
Targeted Gene Expression Profiling	●	●	●	●	●
miRNA & Small RNA Analysis	●	●	●	●	●
DNA-Protein Interaction Analysis (ChIP-Seq)			●	●	●
Methylation Sequencing				●	●
16S Metagenomic Sequencing		●	●	●	●
Metagenomic Profiling (shotgun metagenomics, metatranscriptomics)				●	●
Cell-Free Sequencing & Liquid Biopsy Analysis				●	●
<b>Run Time</b>	9.5–19 hrs	4–24 hours	4–55 hours	12–30 hours	11–48 hours
<b>Maximum Output</b>	1.2 Gb	7.5 Gb	15 Gb	120 Gb	330 Gb*
<b>Maximum Reads Per Run</b>	4 million	25 million	25 million †	400 million	1.1 billion*
<b>Maximum Read Length</b>	2 × 150 bp	2 × 150 bp	2 × 300 bp	2 × 150 bp	2 × 150 bp

# Sequencers – Illumina

illumina®

Benchtop Sequencers

Production-Scale Sequencers



NextSeq 1000 & 2000



NovaSeq 6000



NovaSeq X Series

Popular Applications & Methods	Key Application <span style="color: #e91e63;">■</span>	Key Application <span style="color: #9e9e9e;">■</span>	Key Application <span style="color: #00bcd4;">■</span>
Large Whole-Genome Sequencing (human, plant, animal)		●	●
Small Whole-Genome Sequencing (microbe, virus)	●	●	●
Exome & Large Panel Sequencing (enrichment-based)	●	●	●
Targeted Gene Sequencing (amplicon-based, gene panel)	●	●	●
Single-Cell Profiling (scRNA-Seq, scDNA-Seq, oligo tagging assays)	●	●	●
Transcriptome Sequencing (total RNA-Seq, mRNA-Seq, gene expression profiling)	●	●	●
Chromatin Analysis (ATAC-Seq, ChIP-Seq)	●	●	●
Methylation Sequencing	●	●	●
Metagenomic Profiling (shotgun metagenomics, metatranscriptomics)	●	●	●
Cell-Free Sequencing & Liquid Biopsy Analysis	●	●	●
<b>Run Time</b>	11-48 hours	~13–38 hours (dual SP flow cells) ~13–25 hours (dual S1 flow cells) ~16–36 hours (dual S2 flow cells) ~44 hours (dual S4 flow cells)	~13–21 hours (1.5B flow cells <sup>†</sup> ) ~18–24 hours (10B flow cells <sup>†</sup> ) ~48 hours (25B flow cells <sup>†</sup> )
<b>Maximum Output</b>	360 Gb *	6000 Gb	16 Tb
<b>Maximum Reads Per Run</b>	1.2 billion *	20 billion	26 billion (single flow cells) 52 billion (dual flow cells)
<b>Maximum Read Length</b>	2 × 150 bp	2 × 250 bp**	2 × 150 bp

# Sequencers – Illumina (pre-2020)



Popular Applications & Methods	Key Application <span style="color: #00A0C0;">■</span>	Key Application <span style="color: #90C090;">■</span>	Key Application <span style="color: #FFC000;">■</span>	Key Application <span style="color: #E0A0C0;">■</span>
Large Whole-Genome Sequencing (human, plant, animal)	●	●	●	●
Small Whole-Genome Sequencing (microbe, virus)	●	●		●
Exome Sequencing	●	●		●
Targeted Gene Sequencing (amplicon, gene panel)	●	●		●
Whole-Transcriptome Sequencing	●	●		●
Gene Expression Profiling with mRNA-Seq	●	●		●
miRNA & Small RNA Analysis	●	●		●
DNA-Protein Interaction Analysis	●	●		●
Methylation Sequencing	●	●		●
Shotgun Metagenomics	●	●		●

### Optimized NGS Sample Tracking and Workflows

See how BaseSpace Clarity LIMS (Laboratory Information Management System) enabled this large genomics lab to standardize lab procedures and cope with increasing sample volumes from diverse clients.

[Read Case Study >](#)








Run Time	12–30 hours	< 1–3.5 days (HiSeq 3000/HiSeq 4000) 7 hours–6 days (HiSeq 2500)	< 3 days	16–36 hours (Dual S2 flow cells) 44 hours (Dual S2 flow cells)
Maximum Output	120 Gb	1500 Gb	1800 Gb	6000 Gb <sup>5</sup>
Maximum Reads Per Run	400 million	5 billion	6 billion	20 billion**
Maximum Read Length	2 × 150 bp	2 × 150 bp	2 × 150 bp	2 × 150 bp

# Sequencers – Thermo Fisher Scientific


Plateformes de séquençage	 <p data-bbox="647 378 879 478"><b>Système Ion PGM™ pour le séquençage de nouvelle génération</b></p>	 <p data-bbox="879 378 1130 478"><b>Système Ion S5™ pour le séquençage de nouvelle génération</b></p>	 <p data-bbox="1130 378 1431 478"><b>Système Ion S5™ XL pour le séquençage de nouvelle génération</b></p>
<p data-bbox="511 506 647 571"><b>Avantages</b></p> <p data-bbox="511 614 647 778"><b>Rapidité</b> : séquençage exécuté en 2 à 7 heures, selon la longueur de lecture et la sortie par la puce</p>	<p data-bbox="647 506 879 571"><b>Évolutivité</b> : de 30 Mo à 2 Go</p> <p data-bbox="647 614 879 778"><b>Rapidité</b> : séquençage exécuté en 2 à 7 heures, selon la longueur de lecture et la sortie par la puce</p>	<p data-bbox="879 506 1130 642"><b>Simplicité</b> : solutions de flux de travaux automatisé, de la préparation des échantillons à l'analyse</p> <p data-bbox="879 685 1130 749"><b>Évolutivité</b> : de 600 Mo à 15 Go</p> <p data-bbox="879 792 1130 921"><b>Rapidité</b> : séquençage effectué en 2,5 à 4 heures (quelle que soit la sortie par la puce)</p>	<p data-bbox="1130 506 1431 642"><b>Simplicité</b> : solutions de flux de travaux automatisé, de la préparation des échantillons à l'analyse</p> <p data-bbox="1130 685 1431 749"><b>Évolutivité</b> : de 600 Mo à 15 Go</p> <p data-bbox="1130 792 1431 921"><b>Rapidité</b> : de l'ADN aux données en 24 heures</p>
<p data-bbox="511 942 647 1006"><b>Applications de séquençage</b></p> <p data-bbox="511 1013 647 1106">ARN ciblé ADN ciblé  Microbien</p>	<p data-bbox="647 942 879 1106">ARN ciblé ADN ciblé  Microbien</p> <p data-bbox="647 1142 879 1170">Transcriptome</p> <p data-bbox="647 1213 879 1242">Exome</p> <p data-bbox="647 1285 879 1302">Séquençage de l'ARN</p>	<p data-bbox="879 942 1130 1106">ARN ciblé ADN ciblé  Microbien</p> <p data-bbox="879 1142 1130 1170">Transcriptome</p> <p data-bbox="879 1213 1130 1242">Exome</p> <p data-bbox="879 1285 1130 1302">Séquençage de l'ARN</p>	<p data-bbox="1130 942 1431 1106">ARN ciblé ADN ciblé  Microbien</p> <p data-bbox="1130 1142 1431 1170">Transcriptome</p> <p data-bbox="1130 1213 1431 1242">Exome</p> <p data-bbox="1130 1285 1431 1302">Séquençage de l'ARN</p>

# Sequencers - MGI (BGI group)




							
	Sequencers +	Sequencers +	Sequencers +	Sequencers +	Sequencers +	Sequencers +	Sequencers +
Product Model	DNBSEQ-T7	DNBSEQ-T7* For HotMPS Only	DNBSEQ-G400	DNBSEQ-G400* For HotMPS Only	DNBSEQ-G400C*	DNBSEQ-G99	DNBSEQ-G50
Features	Ultra-high Throughput	Ultra-high Throughput	Adaptive	Adaptive	Adaptive	Fast	Effective
Applications	Whole Genome Sequencing, Deep Exome Sequencing, Transcriptome Sequencing, and Targeted Panel Projects.	Whole Genome Sequencing, Deep Exome Sequencing, Transcriptome Sequencing, and Targeted Panel Projects.	WGS, WES, Transcriptome sequencing, etc.	WGS, WES, Transcriptome sequencing, etc.	Small RNA, Pathogen Fast Identification etc.	Targeted oncology panel sequencing, infectious disease sequencing, oncology methylation sequencing, small whole-genome sequencing	Small whole genome sequencing, targeted DNA/RNA panels, low-pass whole genome sequencing
Flow Cell Type	FC	FC	FCL & FCS	FCL	FCL	FC	FCL & FCS
Lane/Flow Cell++	1 lane	1 lane	2 or 4 lanes	4 lanes	4 lanes	1 lane	1 lane
Operation Mode	Ultra-high Throughput	Ultra-high Throughput	High Throughput	High Throughput	High Throughput	Small and Medium Throughput	Medium Throughput
Max. Throughput / RUN	6Tb	4Tb	1440Gb	720Gb	360G	48Gb	150Gb
Effective Reads / Flow Cell	5000M	5000M	300M/550M/1500-1800M	1500-1800M	1500-1800M	80M	500M / 100M
Average run time	24~30 hours for PE150 sequencing	20~22 hrs for PE100 sequencing	FCS: 13~37 hours FCL: 14~109 hours	15.5-50.5 hours	17/30 hours	12 hours (PE150)	9~40 hours
Min. Read Length	PE100	PE100	SE50	SE50	SE50	SE100	SE50
Max. Read Length	PE150	PE100	PE300	PE100	SE100	PE150	PE150

# Third-generation sequencing

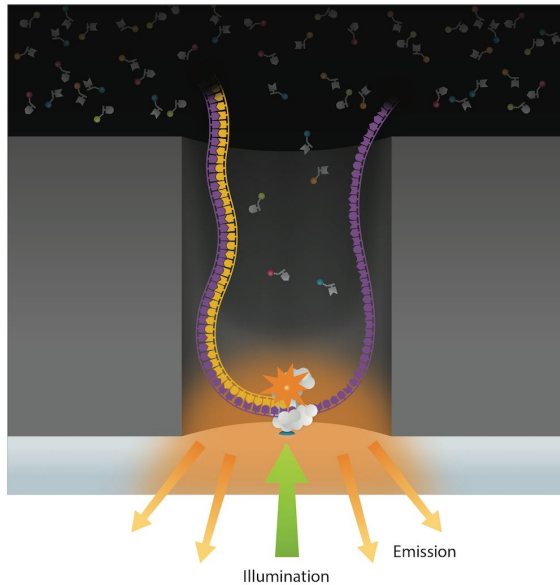

PacBio Sequencing

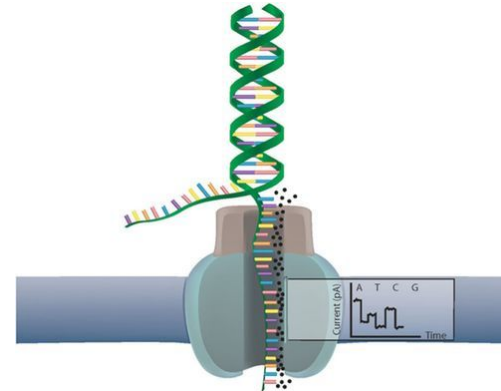


Nanopore technology (ONT)




- much longer reads ( > Kb)
- error rate ( ~ 10 → 40 % )



# Applications

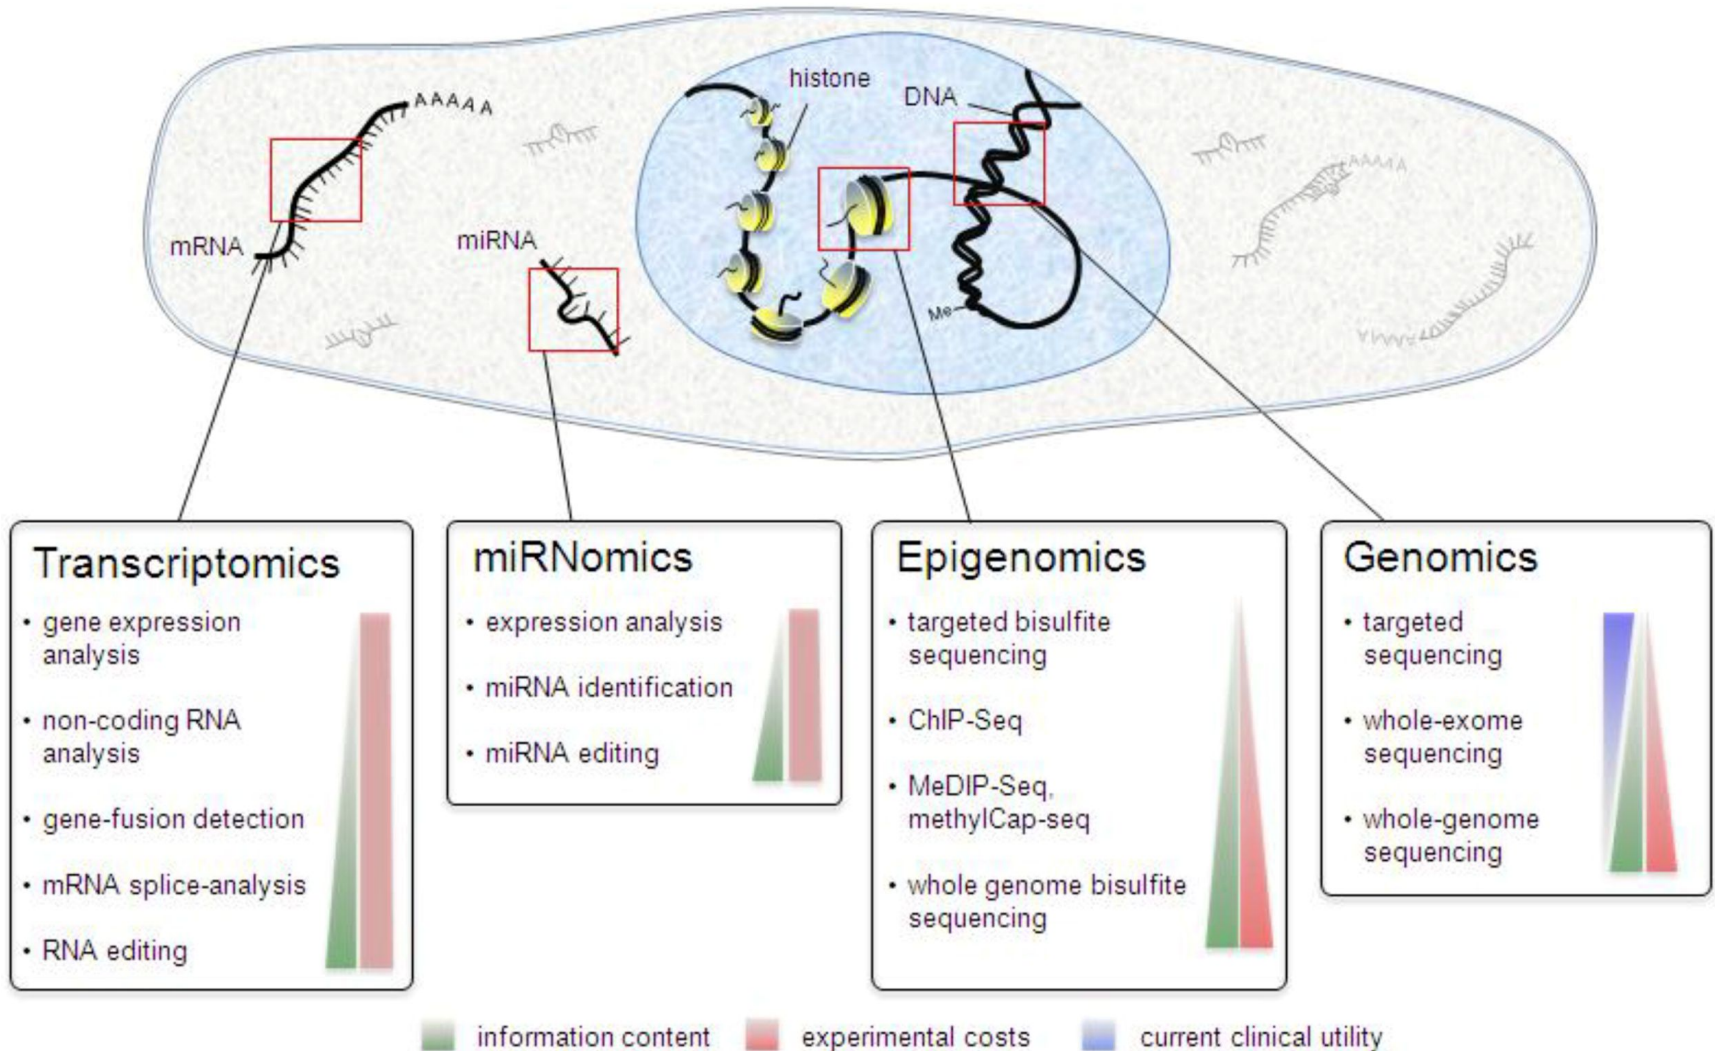


# Applications

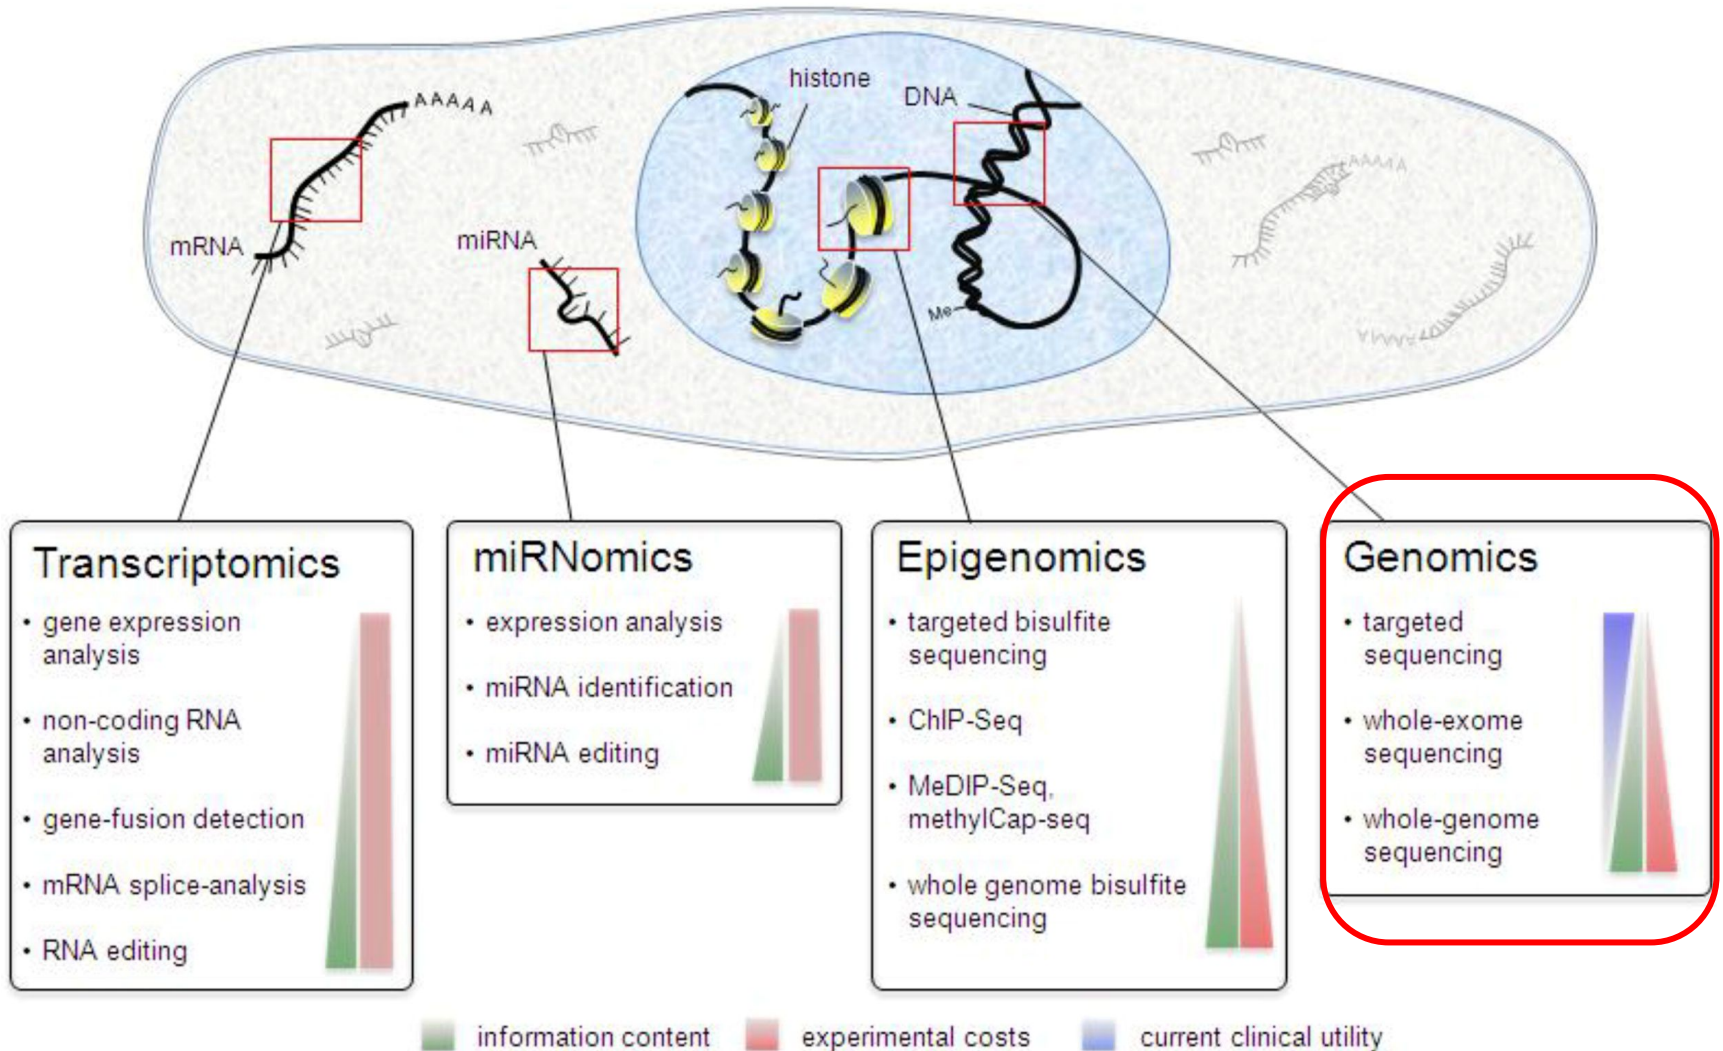




# Applications : genomics (DNA-seq)

## Whole genome sequencing




- Sequencing region : whole genome
- Sequencing Depth : >30X
- Covers everything – can identify all kinds of variants including SNPs, INDELs and SV.

## Whole exome sequencing

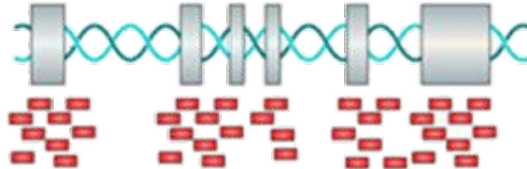

- Sequencing region: whole exome
- Sequencing Depth : >50X ~ 100X
- Identify all kinds of variants including SNPs, INDELs and SV in coding region.
- Cost effective

## Targeted sequencing

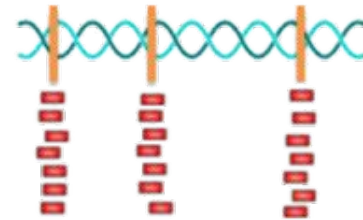

- Sequencing region: specific regions (could be customized)
- Sequencing Depth : >500X
- Identify all kinds of variants including SNPs, INDELs in specific regions
- Most Cost effective

- Targeted sequencing : rapid and cost-effective way to detect known and novel variants in selected sets of genes or genomic regions
- Whole exome sequencing : sequencing all of the protein-coding regions of genes in a genome (applications : discover rare-variants, adjacent splice-sites,...)
- Whole genome sequencing : alterations in regulatory sequences and non-coding regions, chromosomal rearrangements, ....



# NGS workflow

1. Construct Library


2. Clonal Amplification

3. Sequence Library

4. Analyze Data

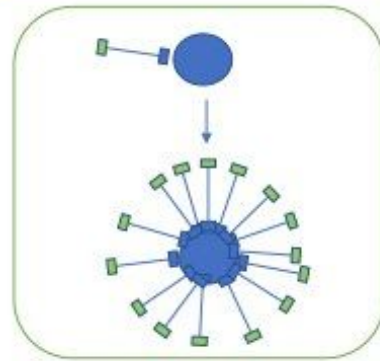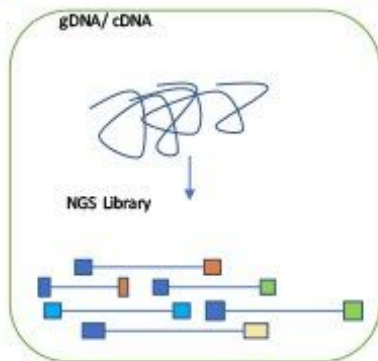


# NGS workflow

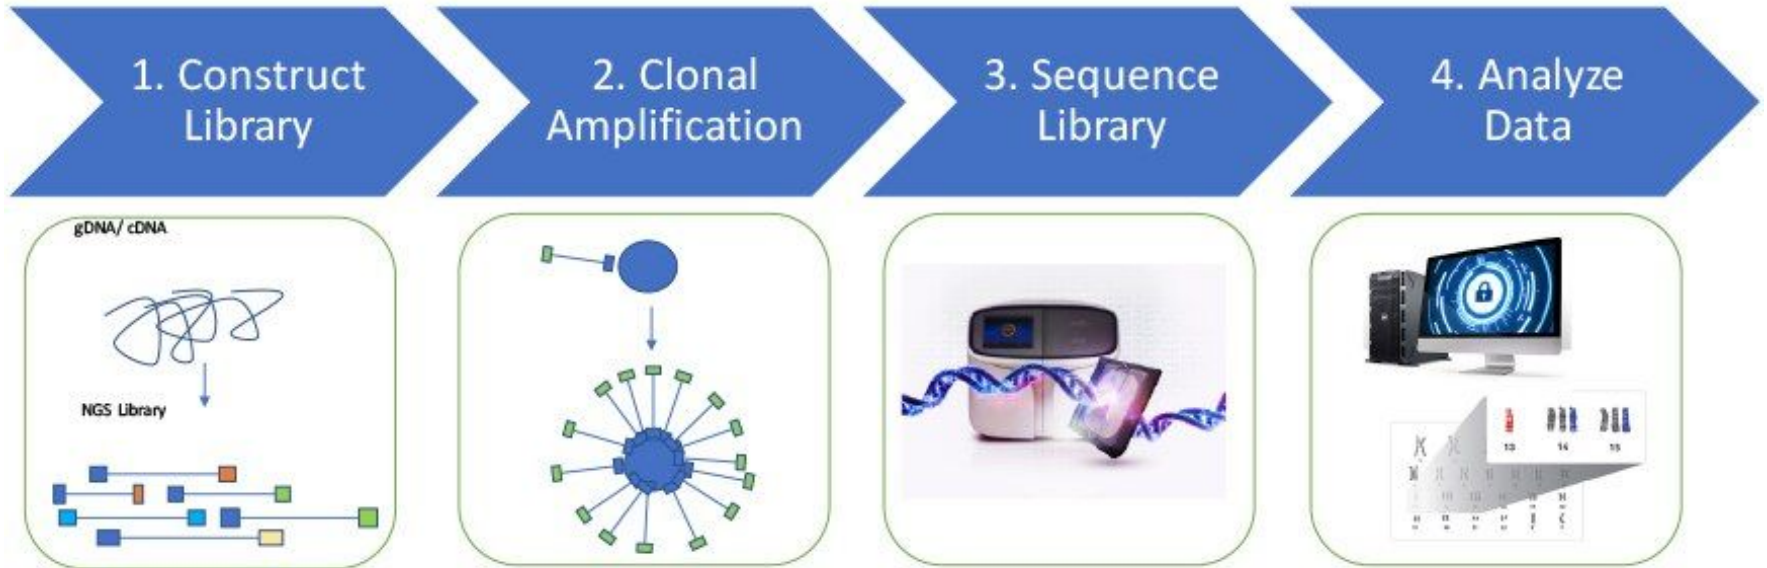


# Library construction

A sequencing “library” must be created from the sample. The DNA (or cDNA) sample is processed into relatively short double-stranded fragments (100–800 bp)

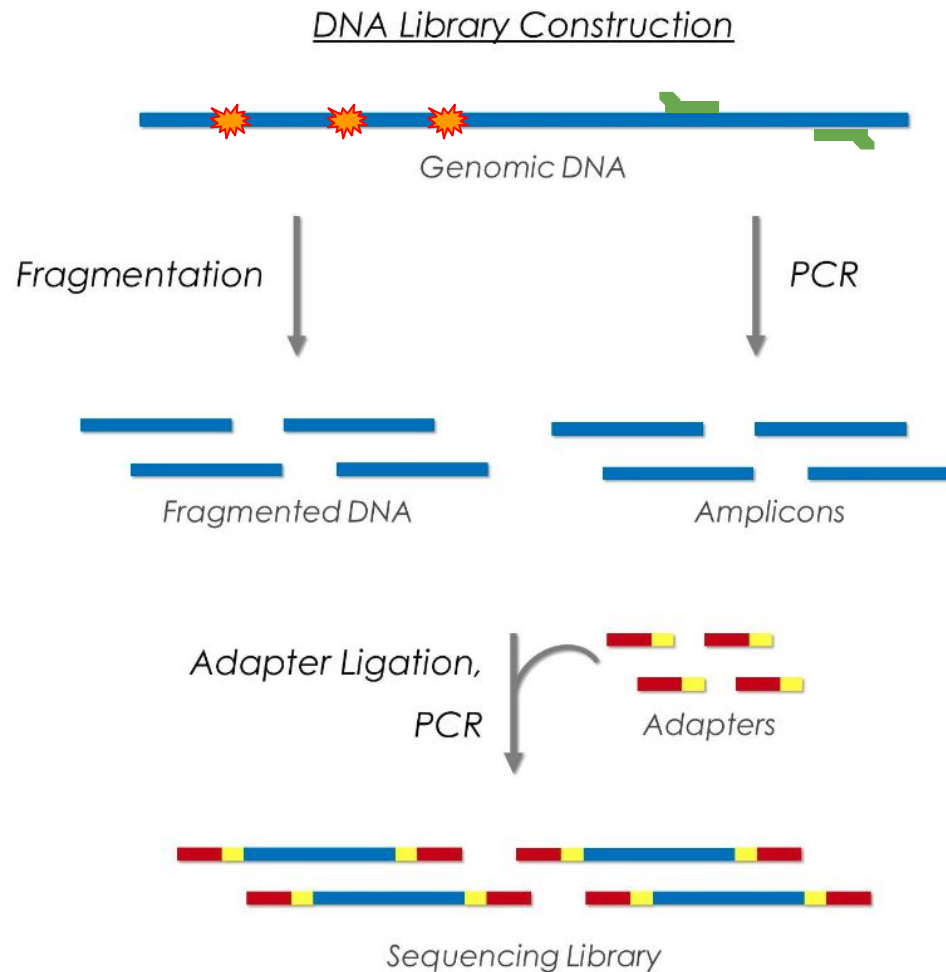


# Library construction

A sequencing “library” must be created from the sample. The DNA (or cDNA) sample is processed into relatively short double-stranded fragments (100–800 bp)

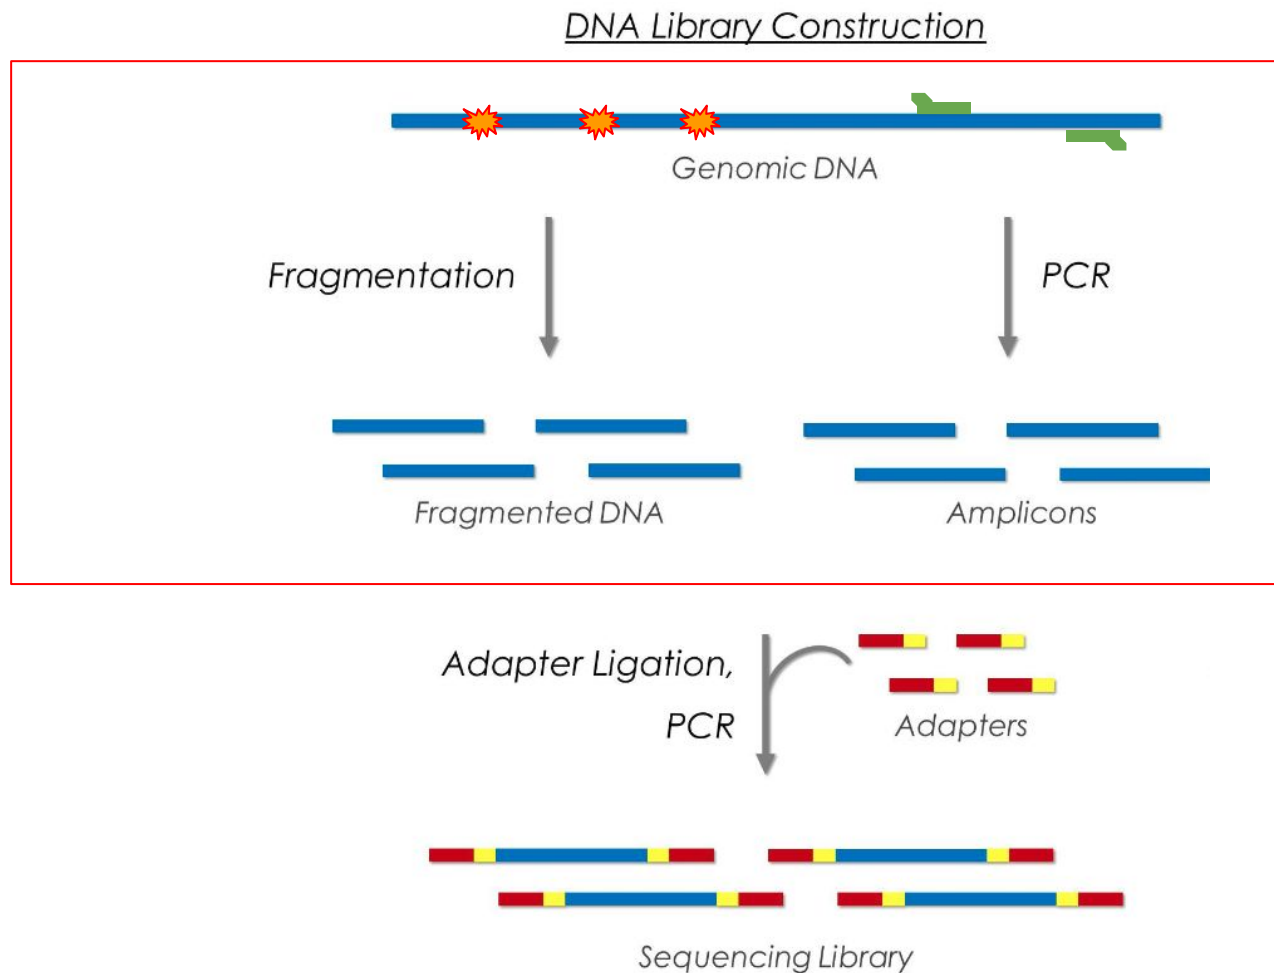

# Library construction

Targeted sequencing : enrichment methods

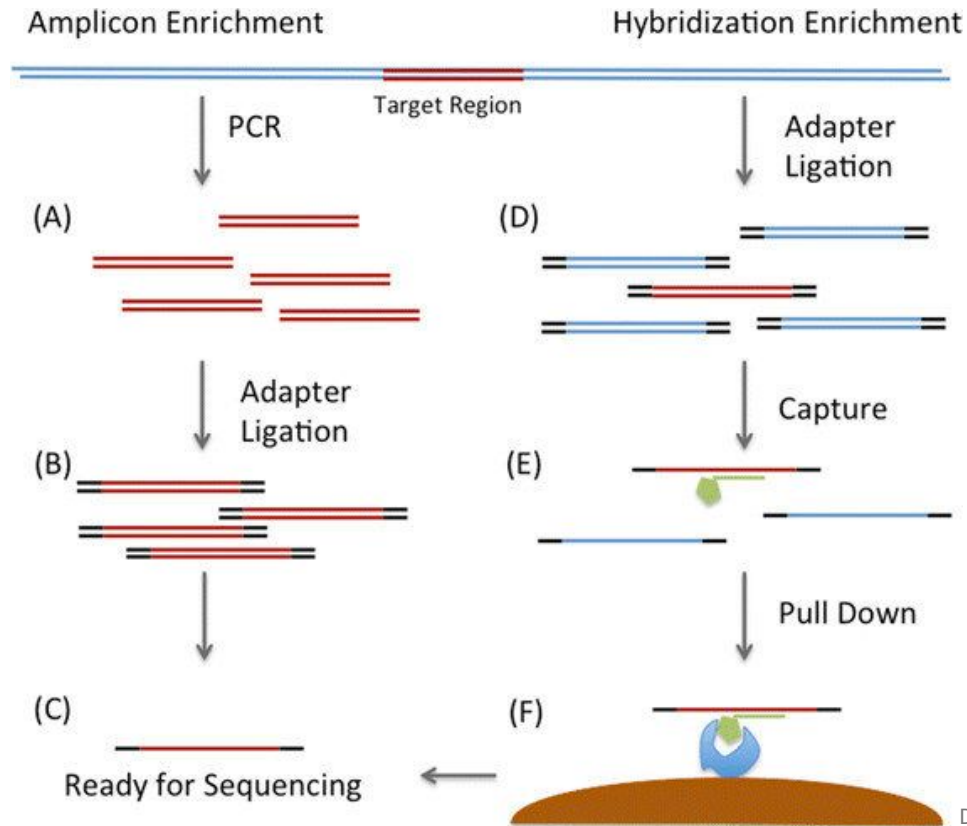

Effective in enrichment and specificity

Simple and fast protocol

Target from Kb to Mb

Low DNA input (100 ng)

HaloPlex

AmpliSeq

...

Effective in enrichment and specificity

Complex procedure

Larger gene panels

Higher DNA input (>1 µg)

Agilent's SureSelect

Roche/Nimbelgen's SeqCap

Illumina's TruSeq and Nextera

...


DOI: [10.1186/s13075-014-0490-4](https://doi.org/10.1186/s13075-014-0490-4)

# Library construction

Multiplex sequencing using DNA barcoding


## SAMPLE 1

DNA Library Construction

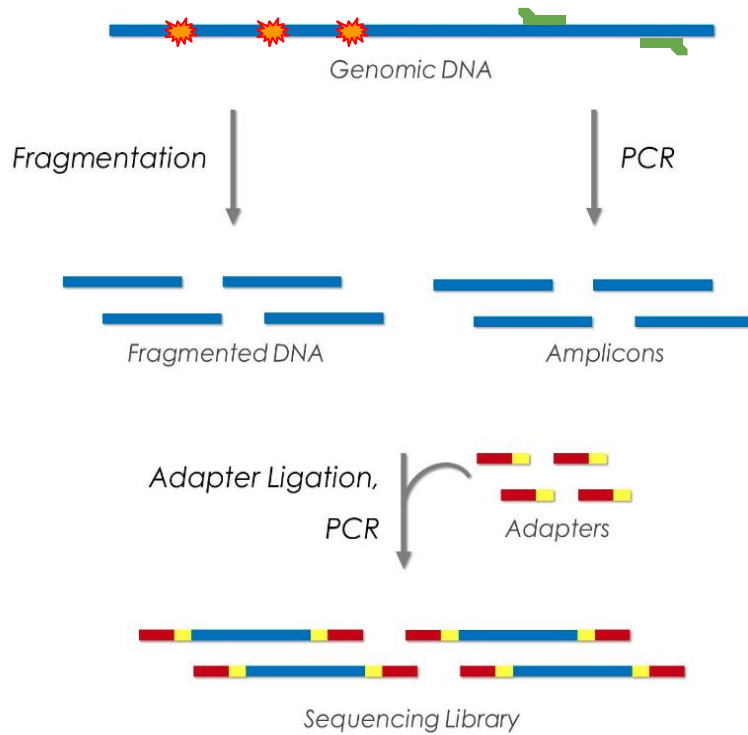

## SAMPLE 2

DNA Library Construction

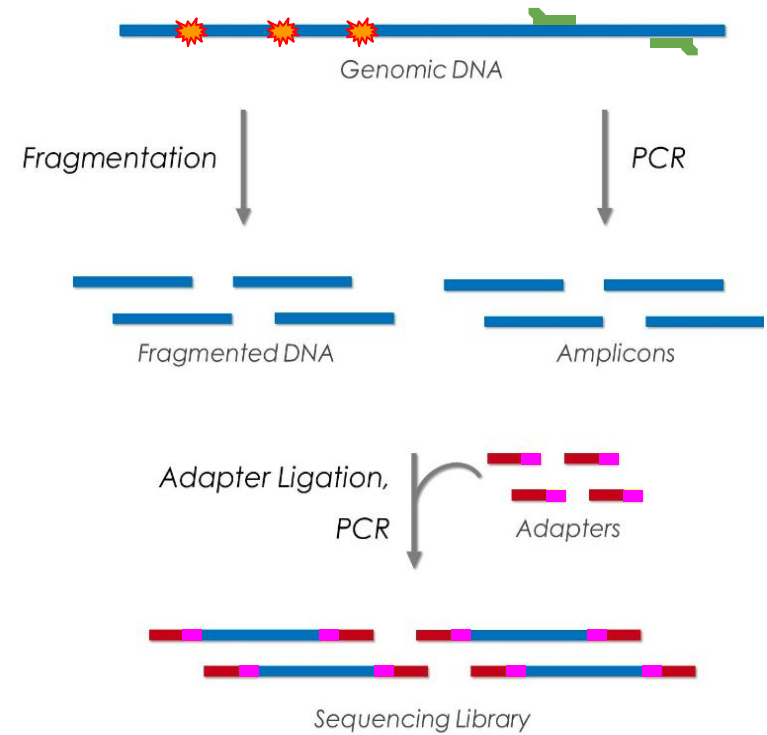


# Single-end vs paired-end

- **Single-End Read:** When sequencing process only occurs in 1 direction
- **Paired-End Read:** When sequencing process occurs in both directions
- **Mate-pair Read:** Short fragments consisting of two segments that originally had a separation of several kilobases in the genome.


Single-End Reads - 5' or 3' (random)



Paired-End Reads - 5' and 3'

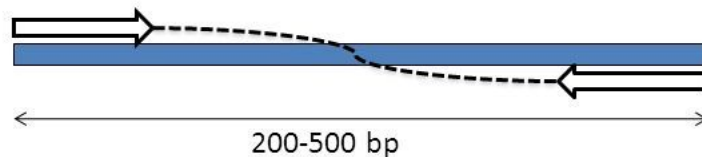

Mate-Pair Reads - 5' and 3'





source: <http://slideplayer.com/slide/7847747/25/images/7/Types+of+Sequencing+Libraries.jpg>




# Paired-end

- **The insert size** is the size of the piece of DNA of interest, without the adapters.

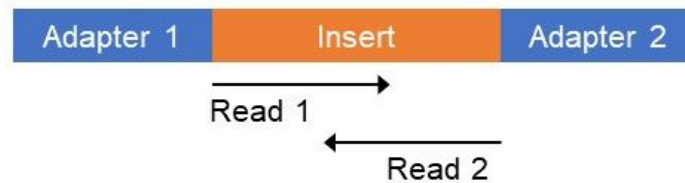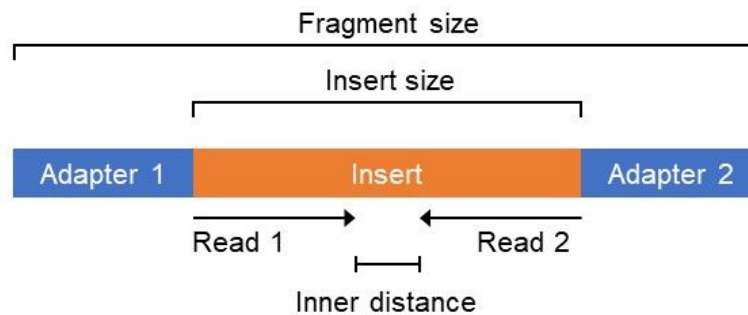


# NGS workflow

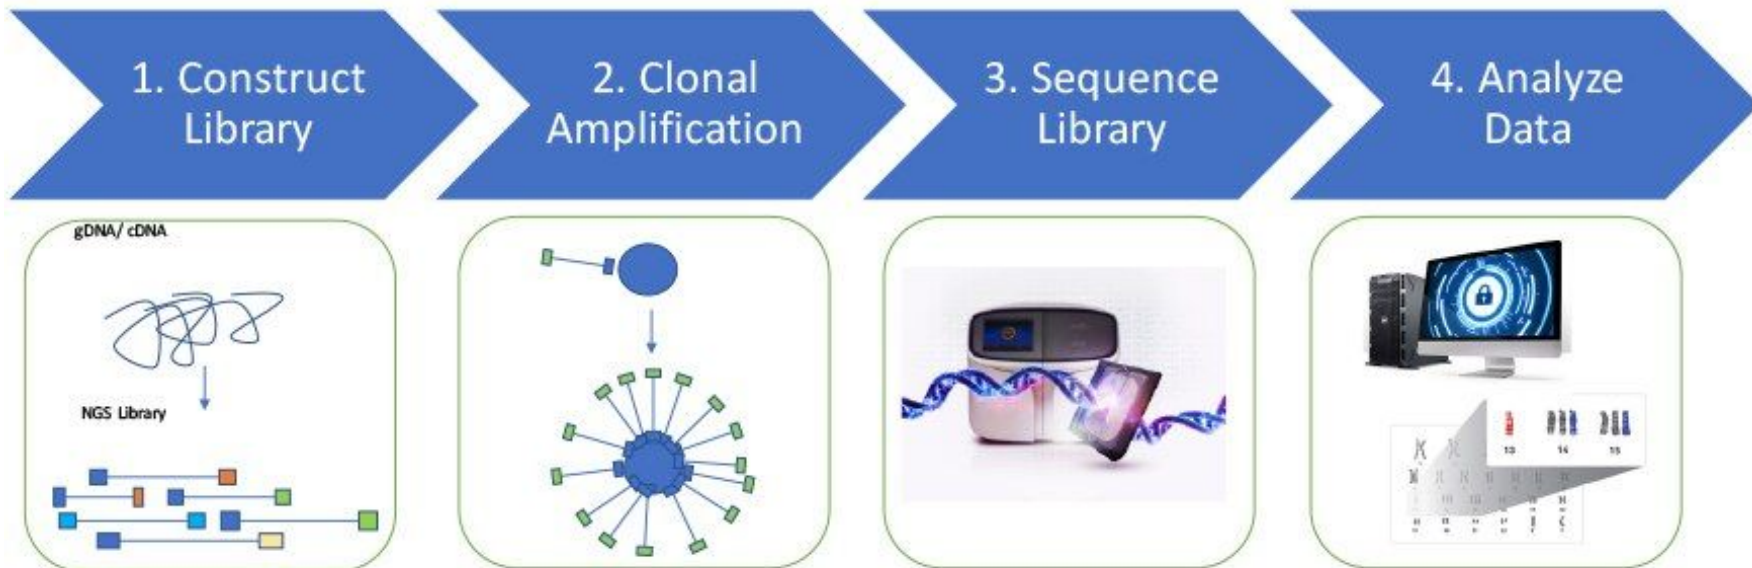


# Clonal amplification

Prior to sequencing, the DNA library must be attached to a solid surface and clonally amplified to increase the signal that can be detected from each target during sequencing.

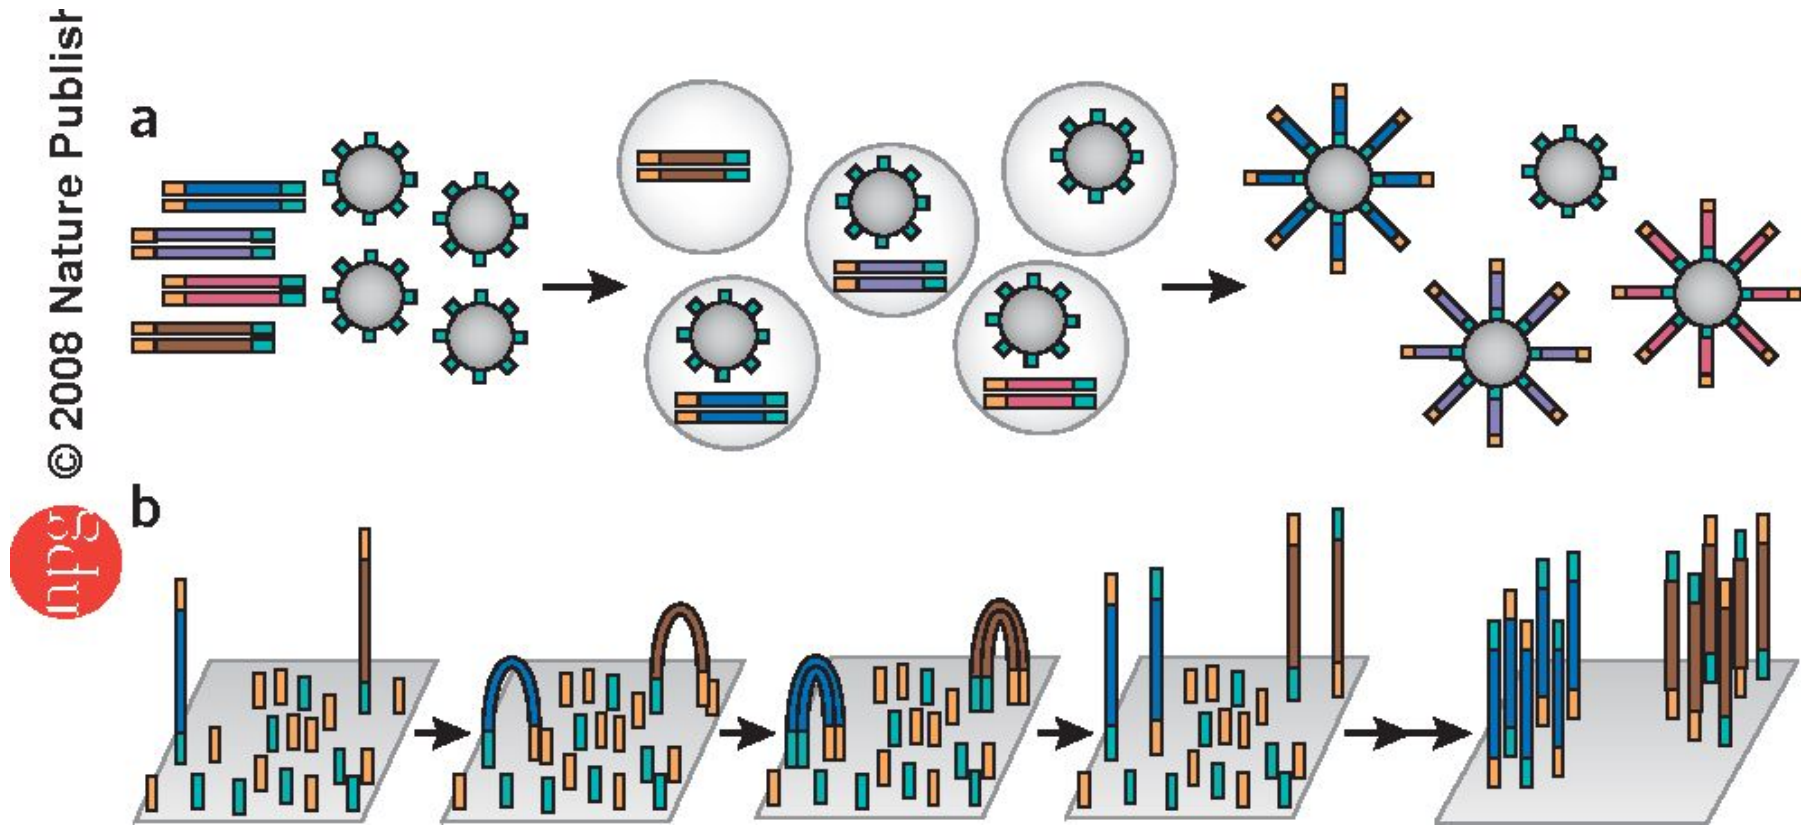


(a) thermofisher platforms rely on emulsion to amplify clonal sequencing features. (b) The Illumina technology relies on bridge PCR<sup>21,22</sup> (aka 'cluster PCR') to amplify clonal sequencing features.

# NGS workflow

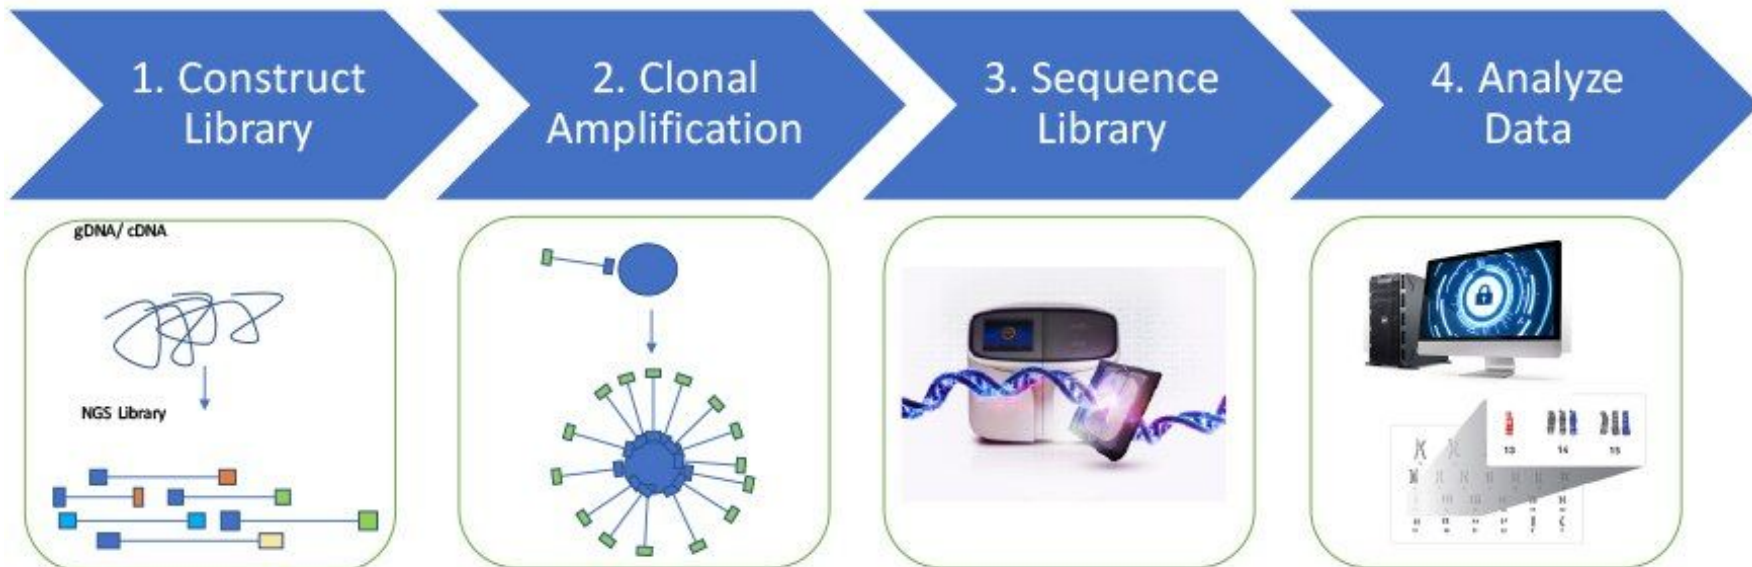


# Sequencing

Illumina technology

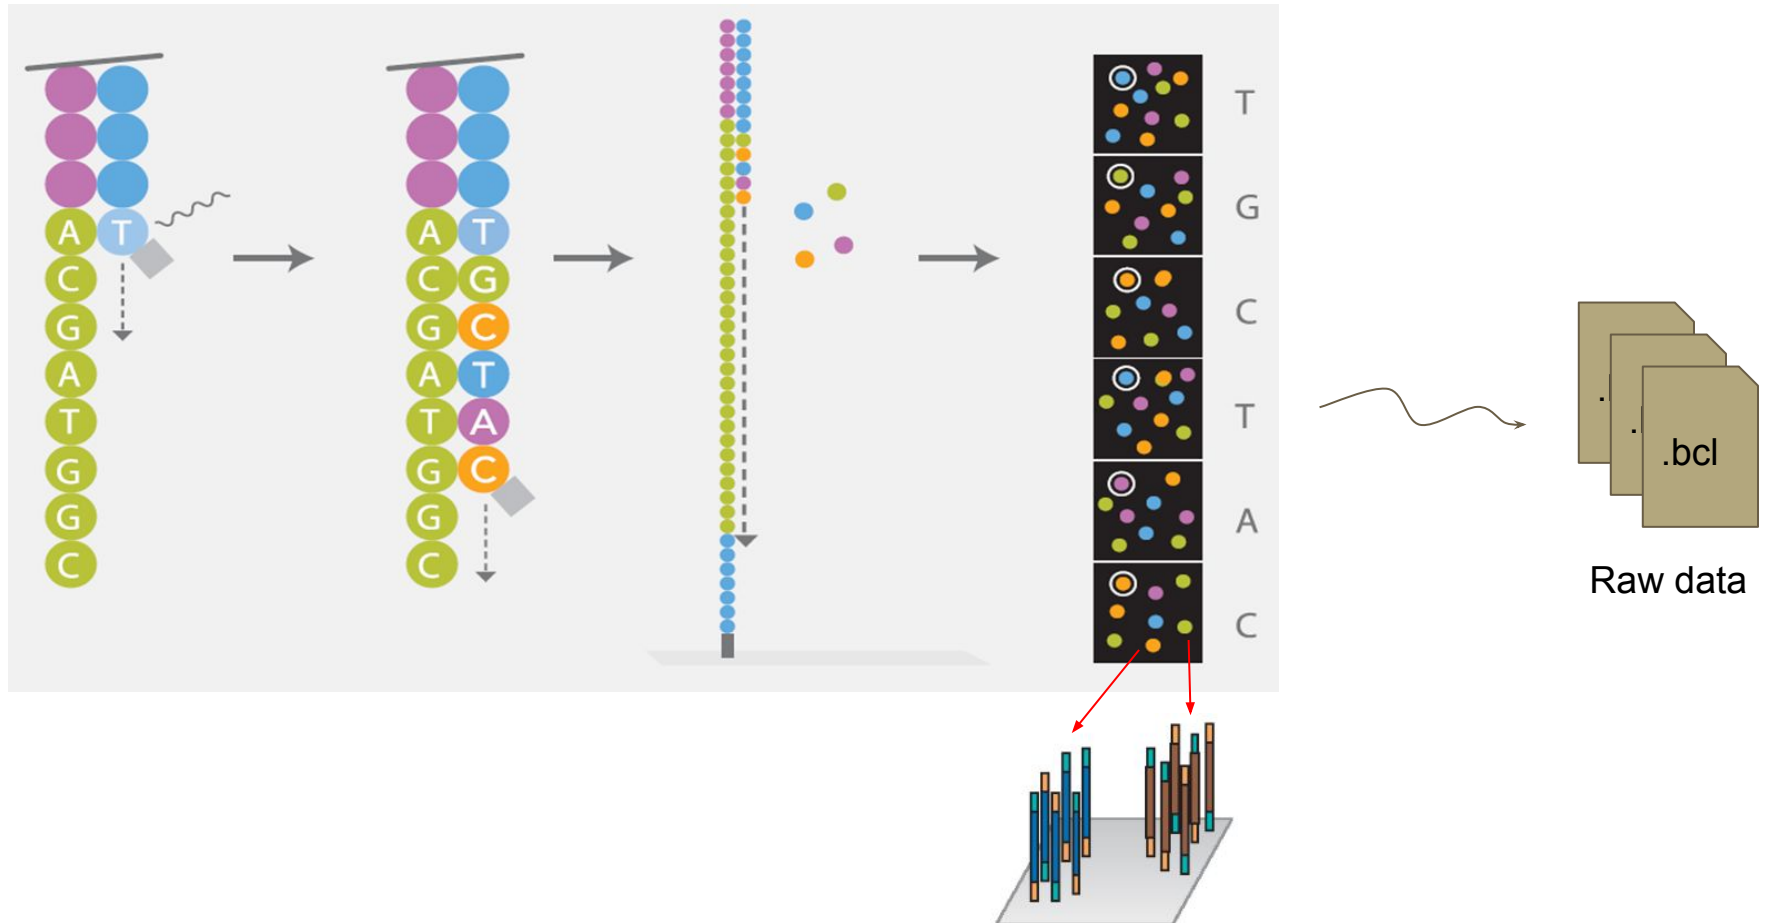


# NGS workflow

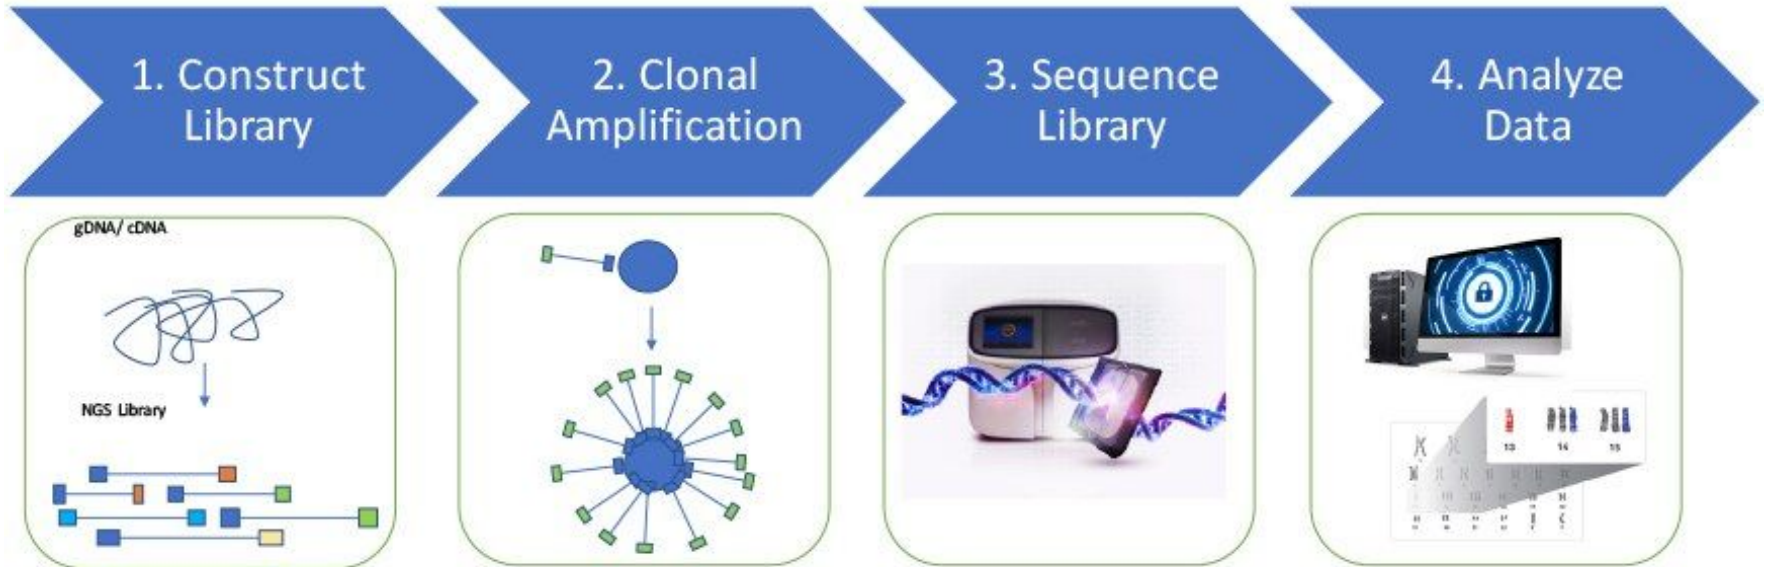

# Data analyses

Extracting reads, Demultiplexing




+

Sample Sheet


[Header]							
IEMFileVersion							
Experiment Name	Project1						
Date	4/16/2016						
Workflow	GenerateFASTQ						
Application	NextSeq FASTQ Only						
Assay	TruSeq LT						
Description							
Chemistry	Default						
[Reads]							
	151						
	151						
[Settings]							
Adapter	AGATCGGAAGAGCACACGTCTGAACTCCAGTCA						
AdapterRead2	AGATCGGAAGAGCGTCGTGTAGGGAAAGAGTGT						
[Data]							
Sample_ID	Sample_Name	Sample_Plate	Sample_Well	I7_Index_ID	index	Sample_Project	Description
Sample_1				A002	CGATGT		
Sample_2				A004	TGACCA		
Sample_3				A005	ACAGTG		
Sample_4				A006	GCCAAT		

bcl2fastq


sample 1



sample 2




sample 3






# Data analyses


Extracting reads, Demultiplexing

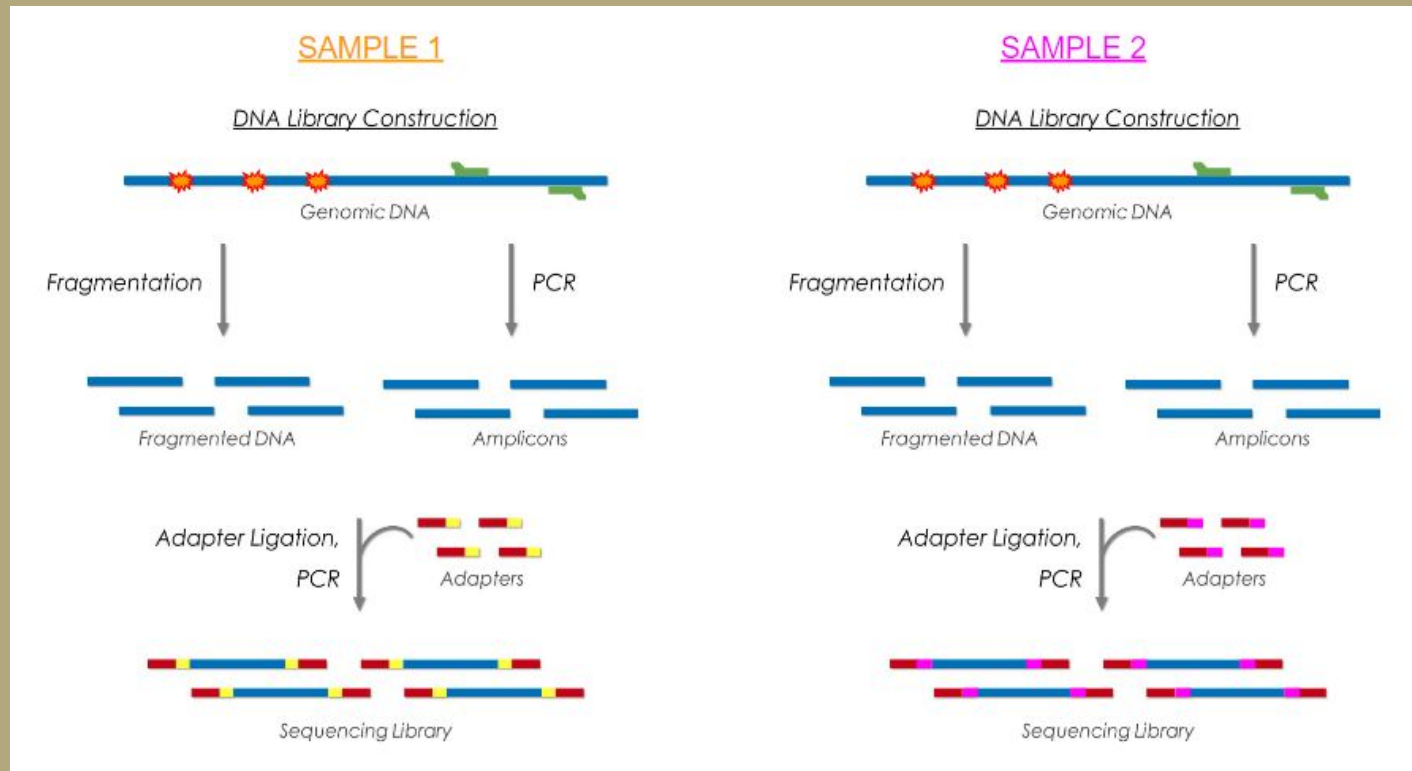


sample 1



sample 2




sample 3





# Coverage and depth of coverage

- **Depth of coverage** = average number of reads covering a base (X)
  - Example: 30X for normal sample, 100X for tumor sample
- **(Breadth of ) Coverage** = percentage of the targeted regions covered by at least X read
  - For example: 90% of a genome is covered at 1X depth; and still 40% is covered at 4X depth.

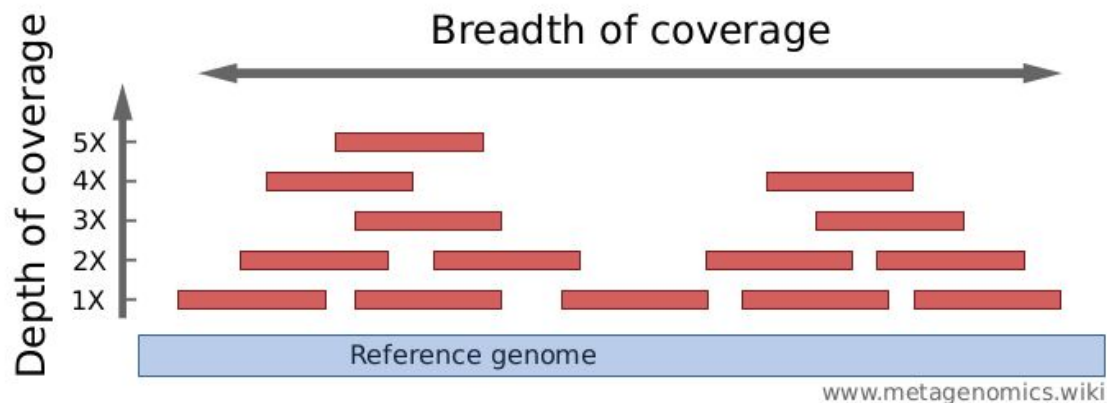

Source :

- Élodie Girard , 5ème Ecole de bioinformatique AVIESAN-IFB 2016 , [http://www.france-bioinformatique.fr/sites/default/files/V01\\_ITMO\\_2016\\_EG\\_from\\_fastq\\_to\\_mapping\\_1.pdf](http://www.france-bioinformatique.fr/sites/default/files/V01_ITMO_2016_EG_from_fastq_to_mapping_1.pdf)  
- <http://www.metagenomics.wiki/pdf/definition/coverage-read-depth>

# Fastq file format

READ

1. Identifier

2. Sequence

4. Quality scores (as ASCII chars)

```
@SRR062641.6751359  
CGCCCGGCCAATCATTGTGGTTTTAAGTCACTAAGTTGAGGCTATTTTGTTTTACAGCAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCT  
+  
CBLNPGJQQQJPPQPPQPQRGPPPPRRQQRPSGRQQQLRRRMEPQQPMJHQQEHKMMFIIRH?SIIHKNJIKRLJJIKHEABHIFGCGGEFCGDGDCE
```

```
@SRR062634.16249693  
CTAAGTTTGAAGGCTATTTTGTTTTACAGCAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCTCTGTGCACCCAGCATTGCCAGAACAGGGC  
+  
ALKMOOOOPPQJQOPPPPPQPPPPPPRJRQOQQQQRPPQPRQQPFQSQQPRLLIMHKSJRQORMFELRPQNQRQJQRRPQQLIRKDMKQJPN8CFDGCCCB
```

```
@SRR062634.20060465  
CTCCCAGCTTCCAACAGACCCTGTCCCAGCTCCCTCCAAGCTGAGTGTGGCCTGATACCTACCAGTGGAGCGAGGGGAACCCGAGGACTGCCAAGGGCA  
+  
D?KMPQEPGCPQONPQIQIGR@DPERQHEKBED=HCHG8EHFD6<329@<:69A<6, ;<967>;=C:>AA8BBED#####
```

# Fastq files (Paired-end)

2 files : R1, R2

## Reads1.fq

```
@ERR229776.100000840
CTAGGAAGCGTAGTCTGGGGTCATCTCTCTATTAATACTGTTGGGAATGTTTAGTA
+
BAEEAGEED96EHFE@BF><>EAAC;EBH<K<6:HJGFFHBC>DDIKG4AIHFFD@0/=
@ERR229776.100020365
CATTATTTCATAGTAGCCAAAAAGTGAAACAGTCAAAATATCCGTCAGTGAATTGACC
+
1.*/./,/&((&3=;B@F860C>@51(3:).6GG-68C*:CG)#B4/=HDJ6;79)<@C/
@ERR229776.100104918
TATTTCTGGAATTTTCCATTTAATATTTTCAGACTGCAGTTGACTGCGGGTAACTGAAA
+
CEEEEFEDAEGGGFDHGFHGHIIHHHIIIGKHBKJJIGHFHKILJKLEJLJJJFJMJK
```

## Reads2.fq

```
@ERR229776.100000840
TTCTGGTCAGTAAGACCTCAAAGTTAAATACTAGCGATTTACACACCTTAAATGATT
+
CFIEEG@FFFGKFJHJ>HHKLLJIIJILLJIIILJHKAKJKKJJJJJLKMJKJJJKJ
@ERR229776.100020365
CCTAAAATGGTGTGTTTTTCGTATATTCACAATGCTGTGGAACCATCACCACTATCTGAT
+
4B@EDFF= (/CHBHEHCE6@ED8E@@I6HJB6E:6%@C46FFIBGCIGKD, DN=CBBE@
@ERR229776.100104918
TCTTTCTTTTGTTTTTTTTTTCTGAGATGTCTTTTGTTTTTTGTCTGAGGCTTGTATG
+
CFI GGGKHHHFFHFIJIIJKLIIHJIIIKLJKKIJKLLKJFJJMHJJLJFJMJIKKJJJ
```

1 interleaved paired file

## Reads.fq

```
@SRR531199.1 ILLUMINA_0130:3:1101:1249:1993 length=101
TTTTTCAGAGTAGTTGGTACCCAAATTGGAAGATGTGACCCACTTCGATACCGCGCTTGAG
+
dffffffffdfeffdadffffeeefdeffeffeffffffffffddeeYdfefefe[e
@SRR531199.1 ILLUMINA_0130:3:1101:1249:1993 length=99
ANNNNNNCTTCGGTATNAACTGGGNNNGATGTTGAACTGGGTAAAGTCGAAGATCTG
+
BBBBBBSZTUVWO]YB_[cbabbWBBBBSVVUUgggadcdedbedcddffdegeggef
@SRR531199.2 ILLUMINA_0130:3:1101:1463:1964 length=101
NTGAGTAGCTCAATGCGCTGACGCCAATAGCTATACCAACGACTGGCCAGATTATGTTT
+
BXSSRU[X[Wcc_cccccccccccc_cccccccccccccccccccccccccccc
@SRR531199.2 ILLUMINA_0130:3:1101:1463:1964 length=99
AAGTGACCATCGCGATAAAGTCTGCGCAGTAAANAGCANCTGTTNGATGCTGGCTTA
+
gggggggggggggggggfgfgggggggggggg^BbbbaBbbaZ]BZ[ccccfgggg
@SRR531199.3 ILLUMINA_0130:3:1101:1366:1970 length=101
NAAGTCGCGGCGACCCCTATCGTGGCTTTCGGCGTACGCCATTTCAATGCGCCGCCCG
+
B[[X[YY[YVcc_cccc_cc_____][[V[^^^V[[SXWUX[\\]]Z^^^B
@SRR531199.3 ILLUMINA_0130:3:1101:1366:1970 length=99
TGGTCAATACAAGCCGCAATACCTGCATCATGCGGNGGAANAATTTGCGCGCGTTTTCT
+
ggfegggggggdeggggfgcgggagggggggg^Bb`^]B[Y[[Zffffh_afeefe
```

# Sequencing reads file formats

## FastQ

READ

1. Identifier

2. Sequence

4. Quality scores (as ASCII chars)

```
@SRR062641.6751359  
CGCCCGGCCAATCATTGTGGTTTTAAGTCACTAAGTTTGAGGCTATTTTGTTTTACAGCAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCT  
+  
CBLNPGJQQQJPPQPPQPQRGPPPPRRQRPSGRQQQLRRRMEPQQPMJHQEHEKMMFIIRH?SIIHKNJIKRLJJKIHEABHIFGCGGEFCGDGDCE
```

```
@SRR062634.16249693  
CTAAGTTTGAGGCTATTTTGTTTTACAGCAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCTCTGTGCACCCAGCATTGCCCAGAACAGGGC  
+  
ALKMOOOOPPQJQOPPPPPQPPPPPPRJRQROQQQRPPQPRQQPFQSQQPRLLIMHKSJRQORMFELRPQNQRQJQRRPQQLIRKDMKQJPN8CFDGDCCCB
```

```
@SRR062634.20060465  
CTCCCAGCTTCCAACAGACCCTGTCCCAGCTCCCTCCAAGCTGAGTGTTGGCCTGATACCTACCAGTGGAGCGAGGGGAACCCGAGGACTGCCAAGGGCA  
+  
D?KMPQEPGCPQONPQIQIGR@DPERQHEKBED=HCHG8EHFD6<329@<:69A<6,;<967>;=C:>AA8BBED#####
```

## FastA

```
>SRR062641.6751359  
CGCCCGGCCAATCATTGTGGTTTTAAGTCACTAAGTTTGAGGCTATTTTGTTTTACAGCAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCT
```

```
>SRR062634.16249693  
CTAAGTTTGAGGCTATTTTGTTTTACAGCAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCTCTGTGCACCCAGCATTGCCCAGAACAGGGC
```

```
>SRR062634.20060465  
CTCCCAGCTTCCAACAGACCCTGTCCCAGCTCCCTCCAAGCTGAGTGTTGGCCTGATACCTACCAGTGGAGCGAGGGGAACCCGAGGACTGCCAAGGGCA
```

Mais aussi: FAST5, BAM, ...

# Jour 1 :

- NGS Introduction
- Reads Quality Control

# Reads quality

- Errors when reading bases
- Depends on sequencing technologie
- Error rate tends to increase with read size

⇒ For each position in the read

- One base (A/T/C/G)
- One error probability

# Phred Quality Score (for a base)

Phred quality scores  $Q$ : logarithmically related to the base-calling error probabilities  $P$

$$Q = -10 \log_{10} P$$

Phred Quality Score	Probability of incorrect base call	Base call accuracy
10	1 in 10	90%
20	1 in 100	99%
30	1 in 1000	99.9%
40	1 in 10,000	99.99%
50	1 in 100,000	99.999%
60	1 in 1,000,000	99.9999%

# Quality score encoding: ASCII table

1. Identifier

2. Sequence

4. Quality scores (as ASCII chars)

READ  
@SRR062641.6751359  
CGCCCGCCAATCATTGTGGTTTTAAGTCACTAAGTTTGAGGCTATTTGTTTTACAGCAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCT  
+  
CBLNPGJQQQJPPQPPQPQRGPPPPRRRQQRPSPRRQQRLRRRMEPQQPMJHQEHEKMMFIIRH?SIIHKNJIKRLJJIKHEABHIFGCGGEFCGDGDCE

@SRR062634.16249693  
CTAAGTTTGAGGCTATTTGTTTTACAGCAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCTCTGTGCACCCAGCATTGCCAGAACAGGGC  
+  
ALKMOOOOPPQJQOPPPPPQPPPPPPRJRQOQQQQRPPRQPPFQSQPRLIMHKSJRQORMFELRPQNQRQJQRRPQQLIRKDMKQJPN8CFDGGCCCB


@SRR062634.20060465  
CTCCAGCTTCCAACAGACCCTGTCCAGCTCCCTCCAAGCTGAGTGTTGGCCTGATACCTACCAGTGAGCGAGGGGAACCCGAGGACTGCCAAGGGCA  
+  
D?KMPQEPGCPQQNPQIQIGR@DPERQHEKBED=HCHG8EHFDCD6<329@<:69A<6,;<967>;=C:>AA8BBED#####

Decimal	Hex	Char	Decimal	Hex	Char	Decimal	Hex	Char	Decimal	Hex	Char
0	0	[NULL]	32	20	[SPACE]	64	40	@	96	60	`
1	1	[START OF HEADING]	33	21	!	65	41	A	97	61	a
2	2	[START OF TEXT]	34	22	"	66	42	B	98	62	b
3	3	[END OF TEXT]	35	23	#	67	43	C	99	63	c
4	4	[END OF TRANSMISSION]	36	24	\$	68	44	D	100	64	d
5	5	[ENQUIRY]	37	25	%	69	45	E	101	65	e
6	6	[ACKNOWLEDGE]	38	26	&	70	46	F	102	66	f
7	7	[BELL]	39	27	'	71	47	G	103	67	g
8	8	[BACKSPACE]	40	28	(	72	48	H	104	68	h
9	9	[HORIZONTAL TAB]	41	29	)	73	49	I	105	69	i
10	A	[LINE FEED]	42	2A	*	74	4A	J	106	6A	j
11	B	[VERTICAL TAB]	43	2B	+	75	4B	K	107	6B	k
12	C	[FORM FEED]	44	2C	,	76	4C	L	108	6C	l
13	D	[CARRIAGE RETURN]	45	2D	-	77	4D	M	109	6D	m
14	E	[SHIFT OUT]	46	2E	.	78	4E	N	110	6E	n
15	F	[SHIFT IN]	47	2F	/	79	4F	O	111	6F	o
16	10	[DATA LINK ESCAPE]	48	30	0	80	50	P	112	70	p
17	11	[DEVICE CONTROL 1]	49	31	1	81	51	Q	113	71	q
18	12	[DEVICE CONTROL 2]	50	32	2	82	52	R	114	72	r





# Example for score interpretation using sanger encoding

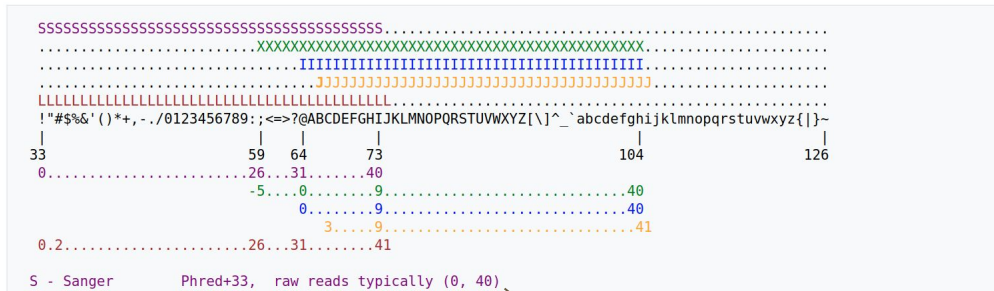

Phred Quality Score	Probability of incorrect base call	Base call accuracy
10	1 in 10	90%
20	1 in 100	99%
30	1 in 1000	99.9%
40	1 in 10,000	99.99%
50	1 in 100,000	99.999%
60	1 in 1,000,000	99.9999%

S - Sanger Phred+33

Bad	:	0-19
Correct	:	20-29
Good	:	30-40

```
@SEQ:ID
ACTGTACGATCGATCGCATGATCAGTACGTCGTACCAGAT
+
!"#$%&'()*+,-./0123456789:;<=>?@ABCDEFGHI
|           |           |           |
0.....1.....2.....3.....4
01234567890123456789012345678901234567890
```

# Quality Control (QC)

Quality Control (QC) is important to:


- Check if your sample sequencing went well
- Know when you need to sequence again (sequencing platform QC fail)
- Identify potential problems that can be fixed, or not
- Follow the impact of preprocessing steps

⇒ FastQC (<https://www.bioinformatics.babraham.ac.uk/projects/fastqc/>)





+ MultiQC (<https://multiqc.info/>) when comparing multiple datasets

# Loss of base call accuracy with increasing sequencing cycles

Source: <https://sequencing.qcfail.com>

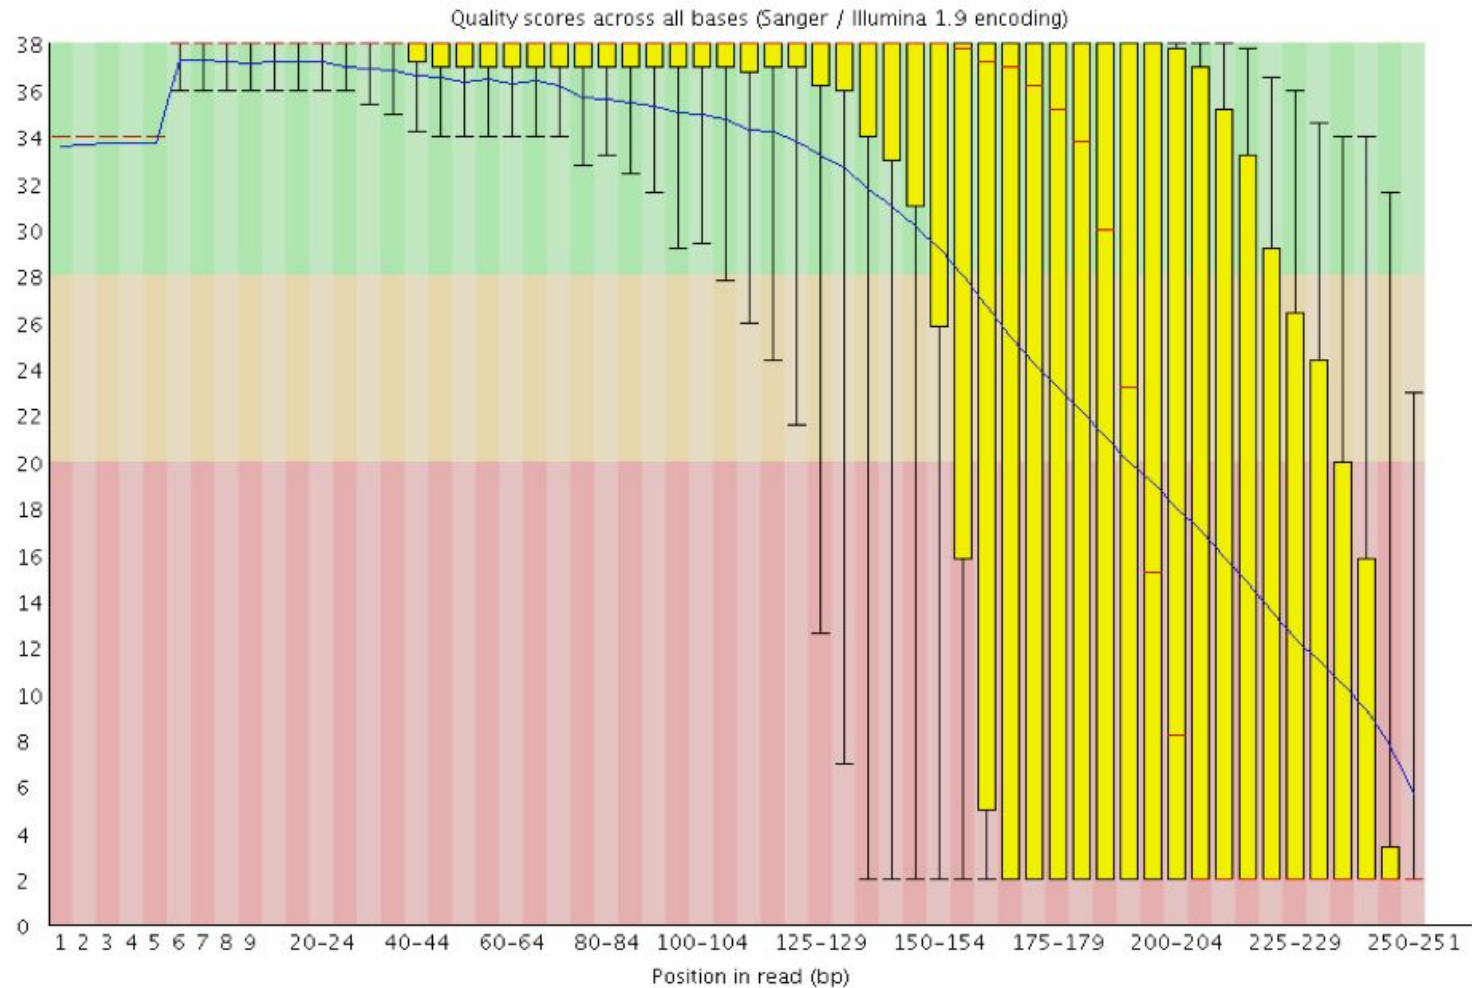


# Position specific failures of flowcells

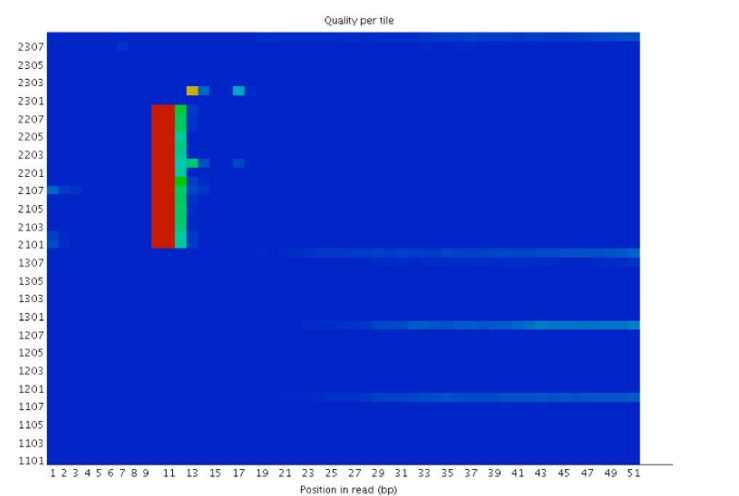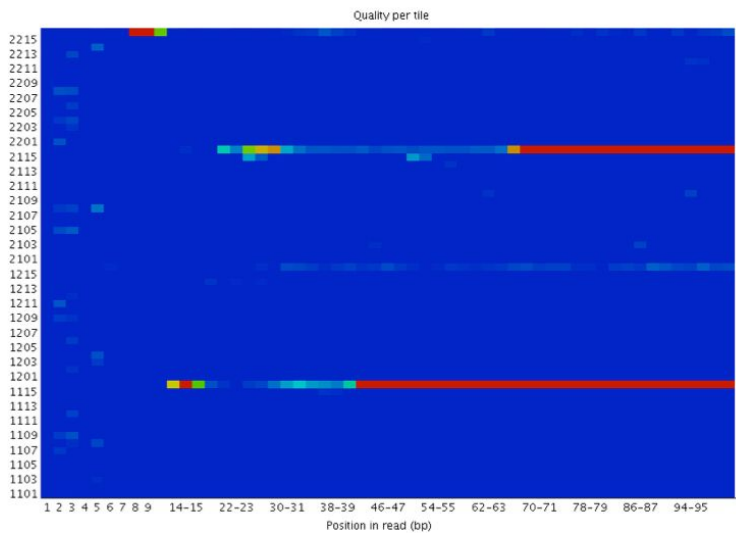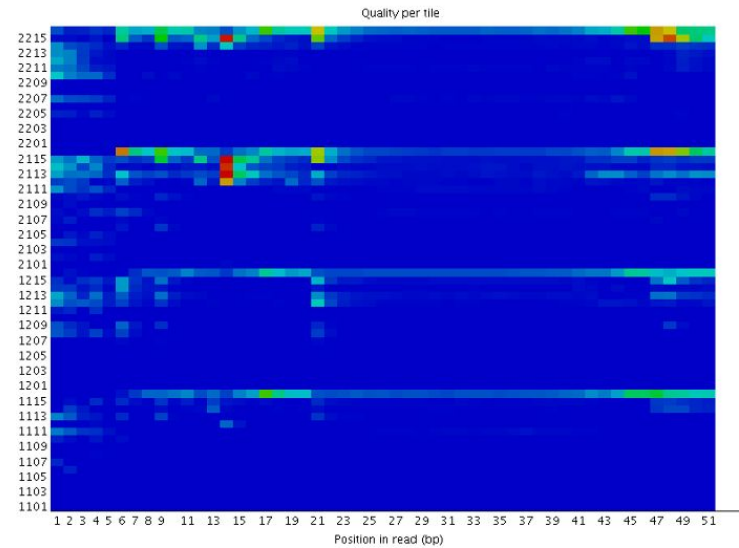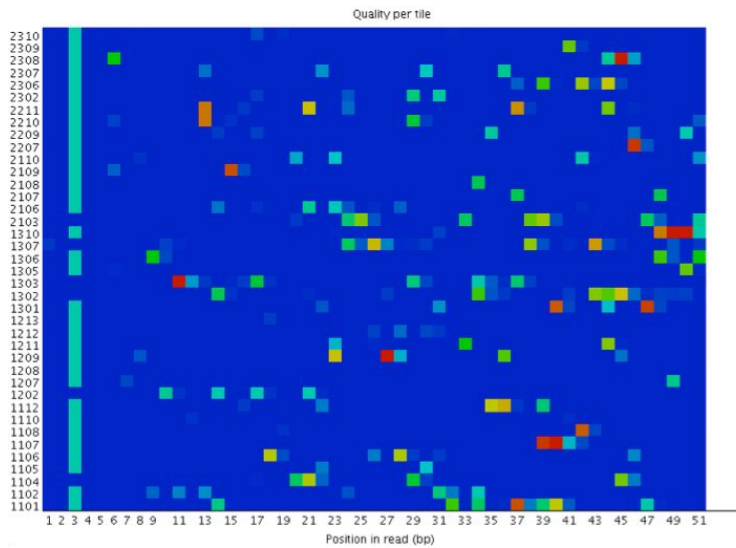

# Positional sequence bias in random primed libraries


Source: <https://sequencing.qcfail.com>

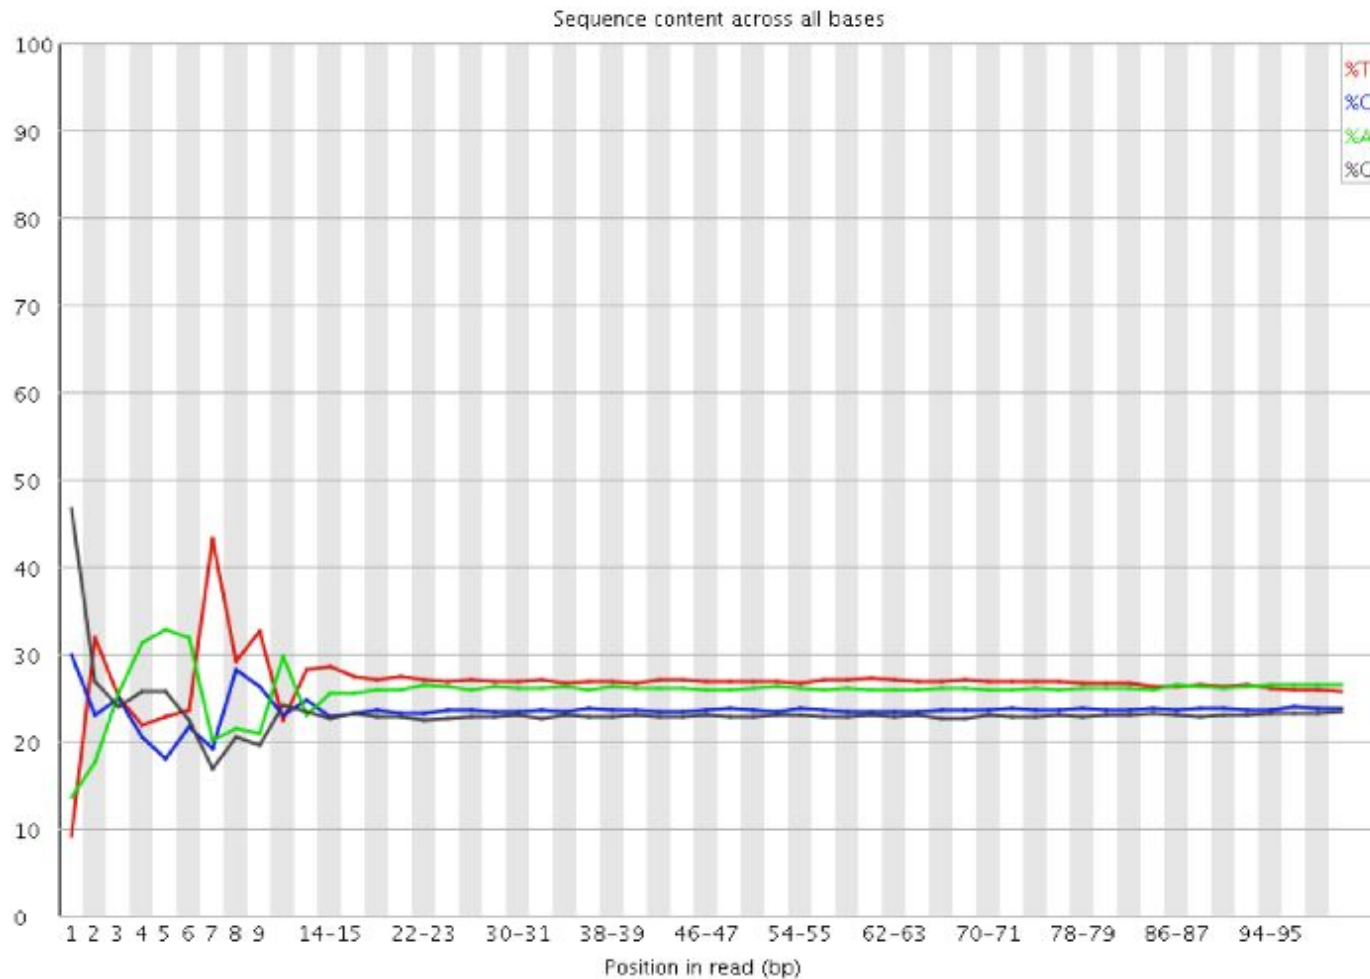




# Contamination with adapter dimers

Source: <https://sequencing.qcfail.com>

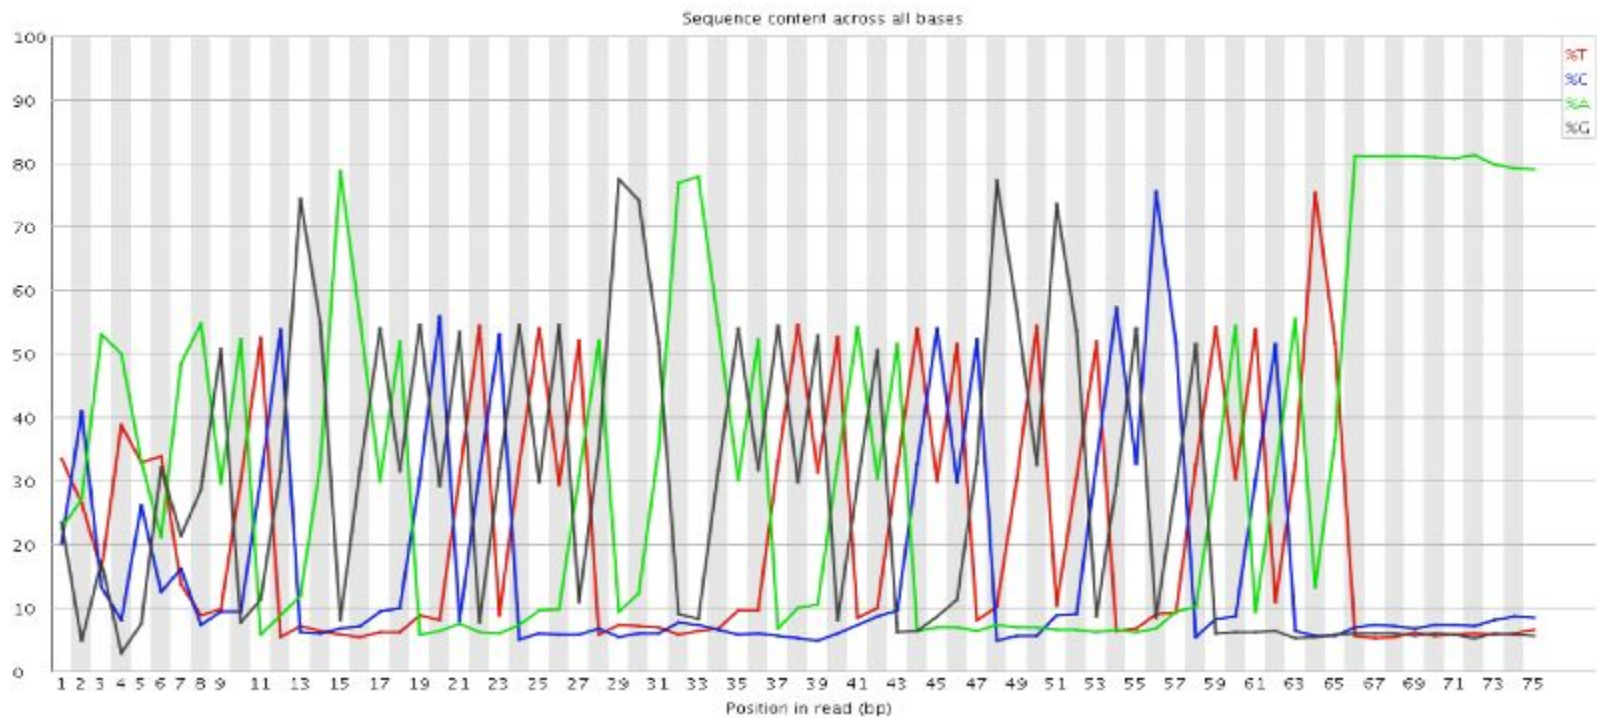


# Libraries contain technical duplication

Source: <https://sequencing.qcfail.com>

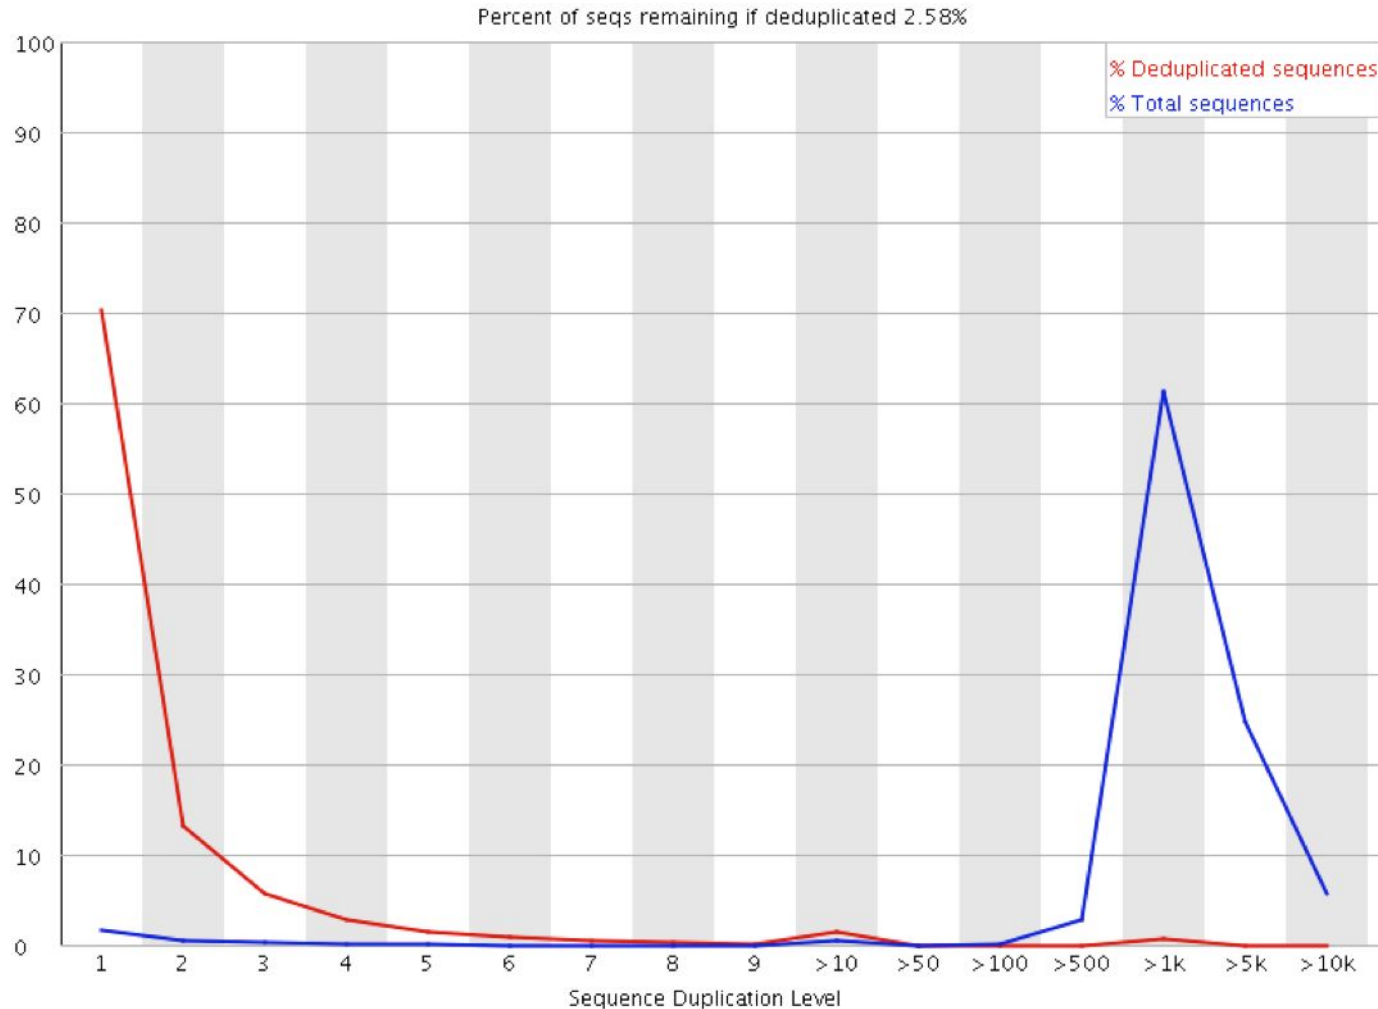




# GC content / Contamination ?

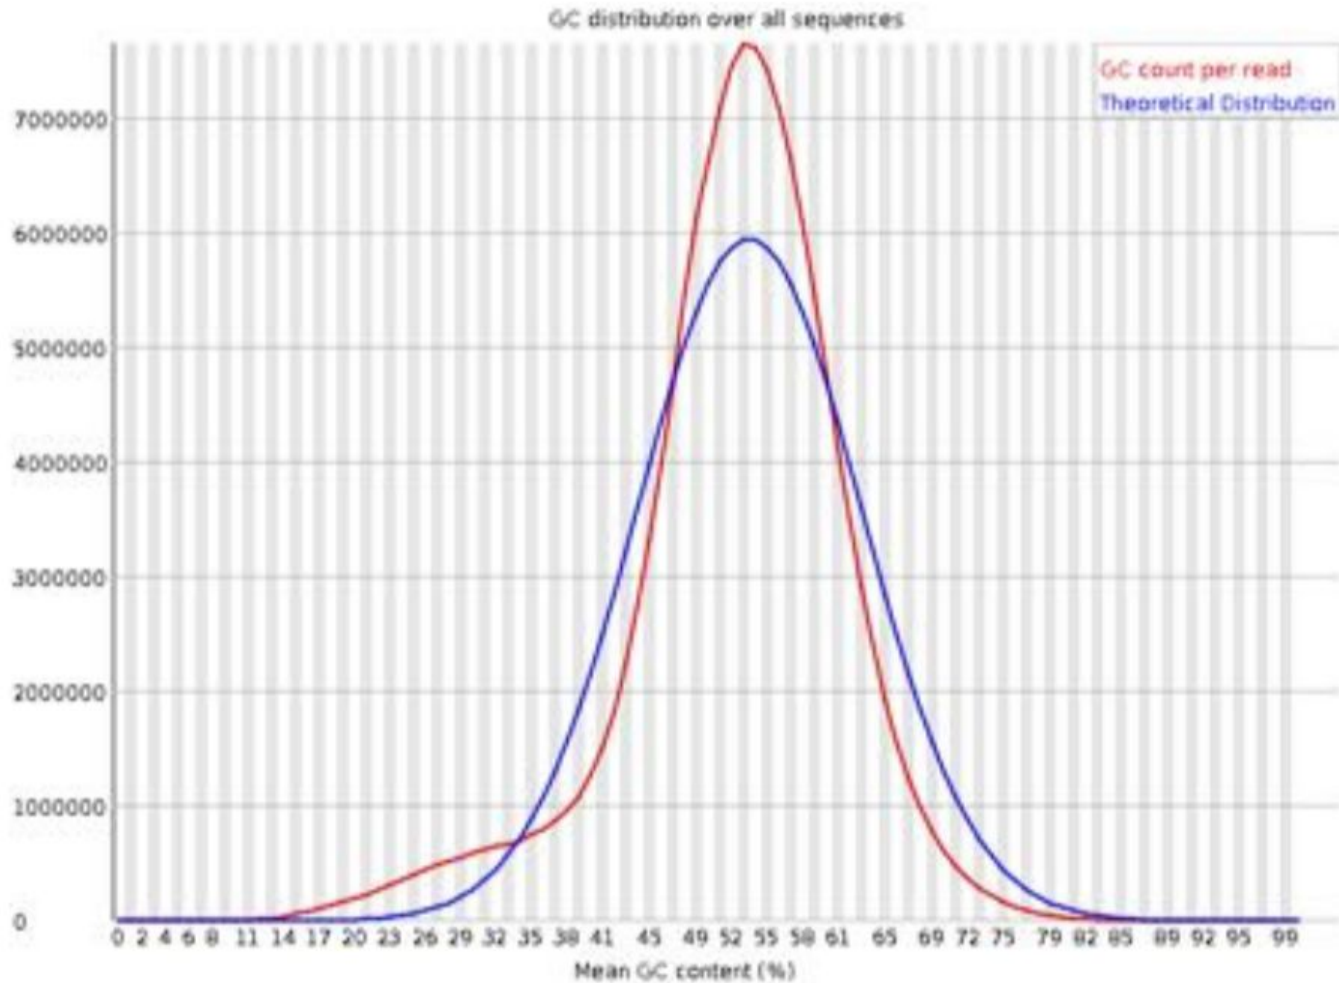


# GC content / Contamination ?

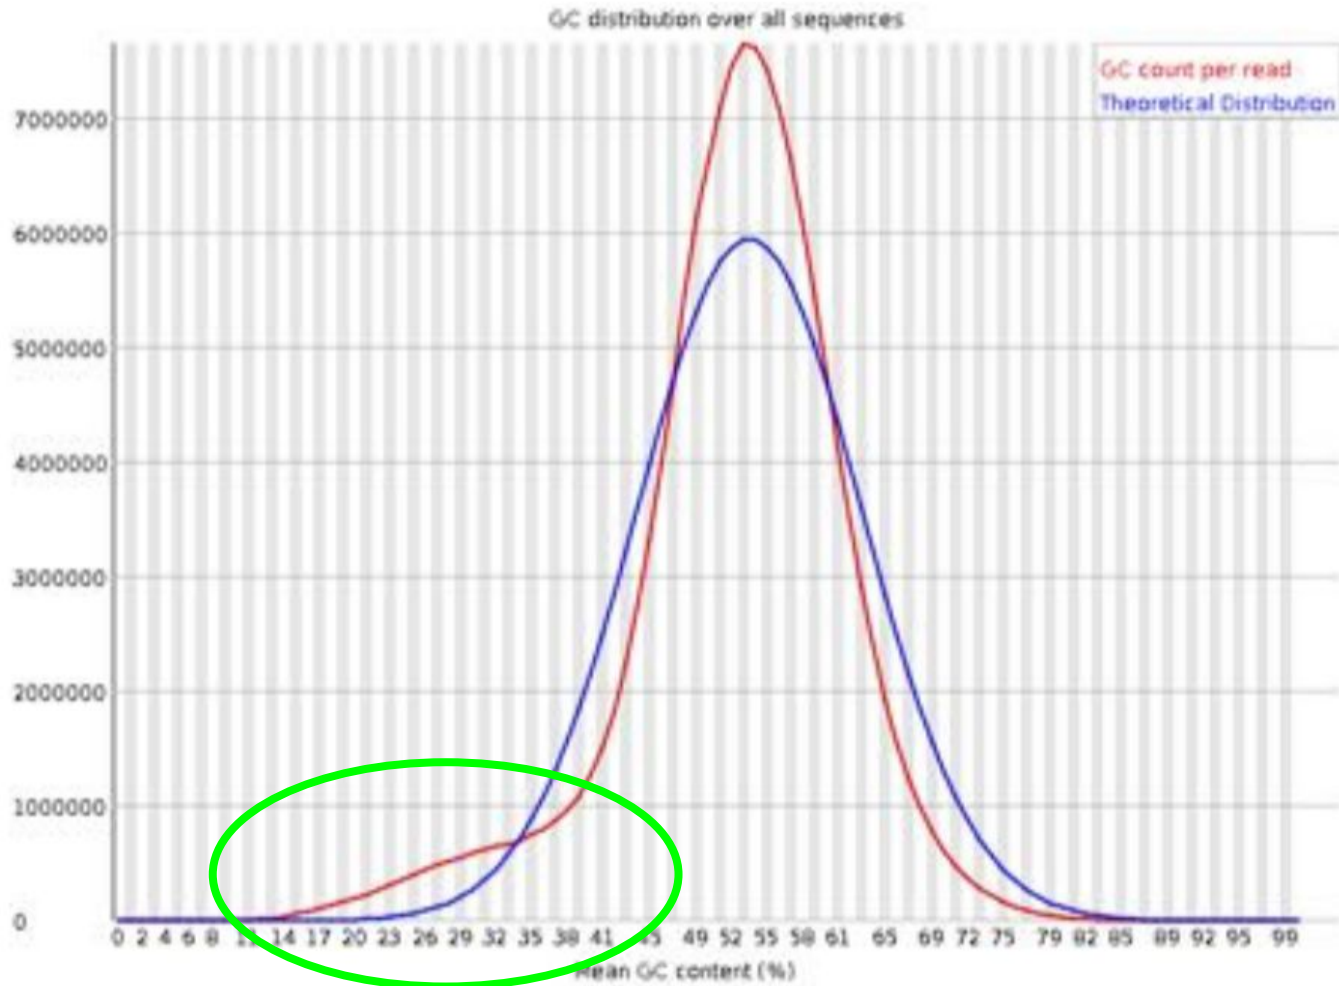


# Adapter content

## ✖ Adapter Content

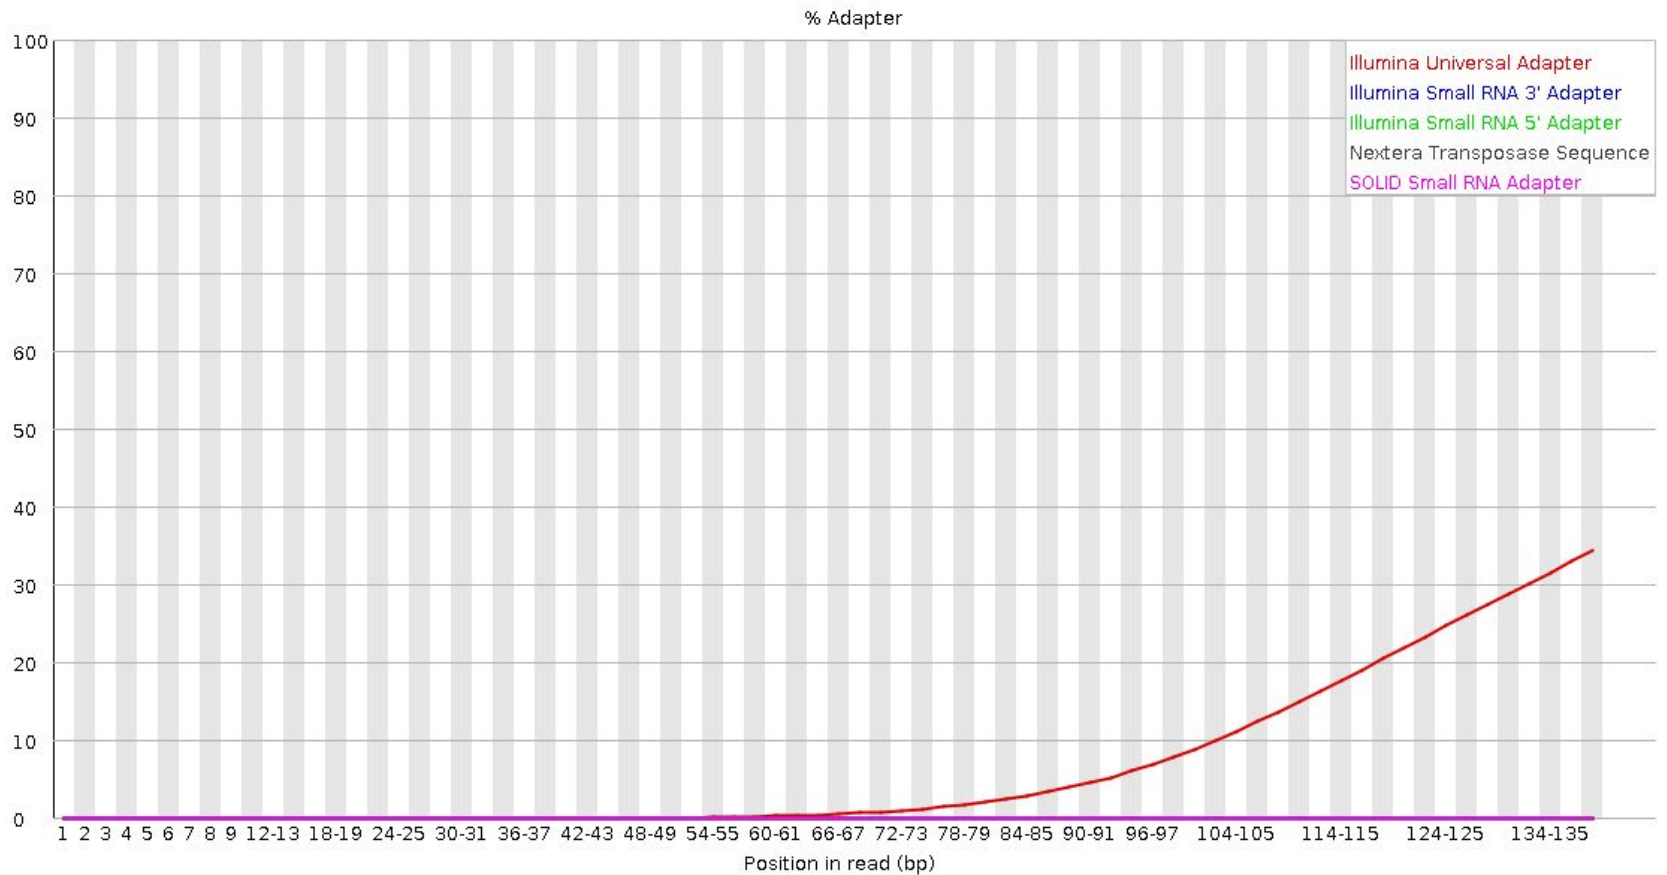

# Adapter content

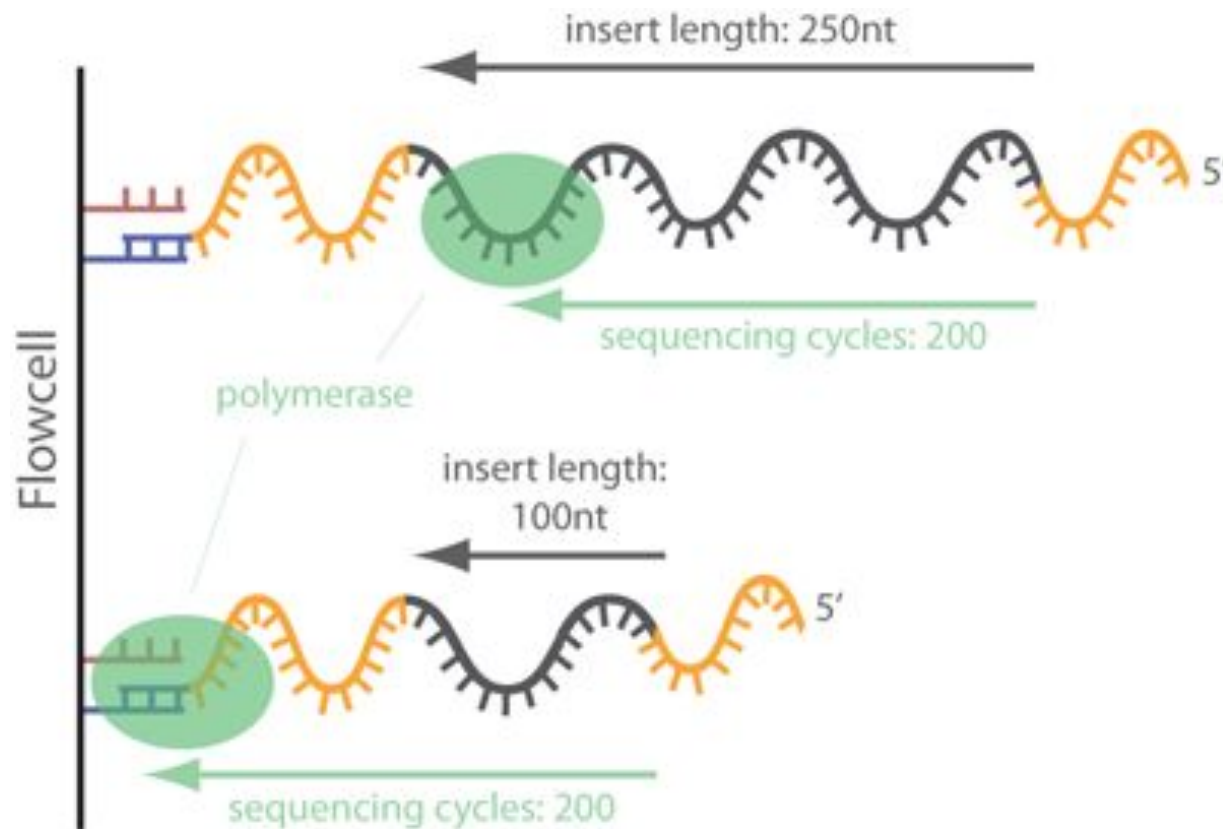

# Jour 1 : Bases de l'analyse NGS pour le RNA-seq

- NGS Introduction
- Reads Quality Control
- Reads Cleaning

# Goal: read cleaning

```
@SRR062641.6751359
CGCCCGGCCAATCATTGTGGTTTTAAGTCACTAAGTTTGAGGCTATTTTGTTTTACAGCAAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCT
+
CBLNPGJQQQJPPQPPQPQRGPPPPRRQQRPS PGRQQQLRRRMEPQQPMJHQEHEKMMFIIRH?SIIHKNJIKRLJJIKEABHIFGCGGEFCGDGDCE
@SRR062634.16249693
CTAAGTTTGAGGCTATTTTGTTTTACAGCAAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCTCTGTGCACCCAGCATTGCCCAGAACAGGGC
+
ALKMOOOOPPQJQOPPPPPQPPPPPRJQRQQQQRPQPRQQPFQSQQPRLIMHKS NRJQORMFELRPQNQRQJQRRPQQLIRKDMKQJRFDFGCCCCB
@SRR062634.20060465
CTCCCAGCTTCCAACAGACCCTGTCCCAGCTCCCTCCAAGCTGAGTGTGGCCTGATACCTACCAGTGGAGCGAGGGGAACCCGAGGACTGCCAAGGGCA
+
D?KMPQEPGCPQQNPQIQIGR@DPERQHEKBEHCHG8EHFD6<329@<:69A<6, ;<967>;=C:>AA8BBED#####
@SRR062635.15516129
AAAAAAAAAAAAAAAAAAAAAAAAAAGGGGGCCCCCCTTTCCCCCGGGGGGGGACAGGGGGGTGTTCCGGCCCCGCGCCGCTTGACCACGG
+
EKLMPPPPPPQQQQQQQQQQQQQQQI#####
```

RAW




```
@SRR062641.6751359
CGCCCGGCCAATCATTGTGGTTTTAAGTCACTAAGTTTGAGGCTATTTTGTTTTACAGCAAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCT
+
CBLNPGJQQQJPPQPPQPQRGPPPPRRQQRPS PGRQQQLRRRMEPQQPMJHQEHEKMMFIIRH?SIIHKNJIKRLJJIKEABHIFGCGGEFCGDGDCE
@SRR062634.16249693
CTAAGTTTGAGGCTATTTTGTTTTACAGCAAAAGCTAACTGATGCAGACAGGGACAAGTCAGTCTCATCTCTGTGCACCCAGCATTGCCCAGAACAGGGC
+
ALKMOOOOPPQJQOPPPPPQPPPPPRJQRQQQQRPQPRQQPFQSQQPRLIMHKS NRJQORMFELRPQNQRQJQRRPQQLIRKDMKQJRFDFGCCCCB
@SRR062634.20060465
CTCCCAGCTTCCAACAGACCCTGTCCCAGCTCCCTCCAAGCTGAG
+
D?KMPQEPGCPQQNPQIQIGR@DPERQHEKBEHCHG8EHFD
```

Clean

# Reads cleaning

- Cut adaptators at read ends
- Trimming : cut read ends (5' ou 3')
  - Fixed number of bases
  - Individual base quality
  - Mean quality of bases in a sliding window
- Filtering : remove read
  - Size criteria (example  $< 60\text{bp}$ )
  - Mean base quality for all bases criteria (example  $< 25$ )

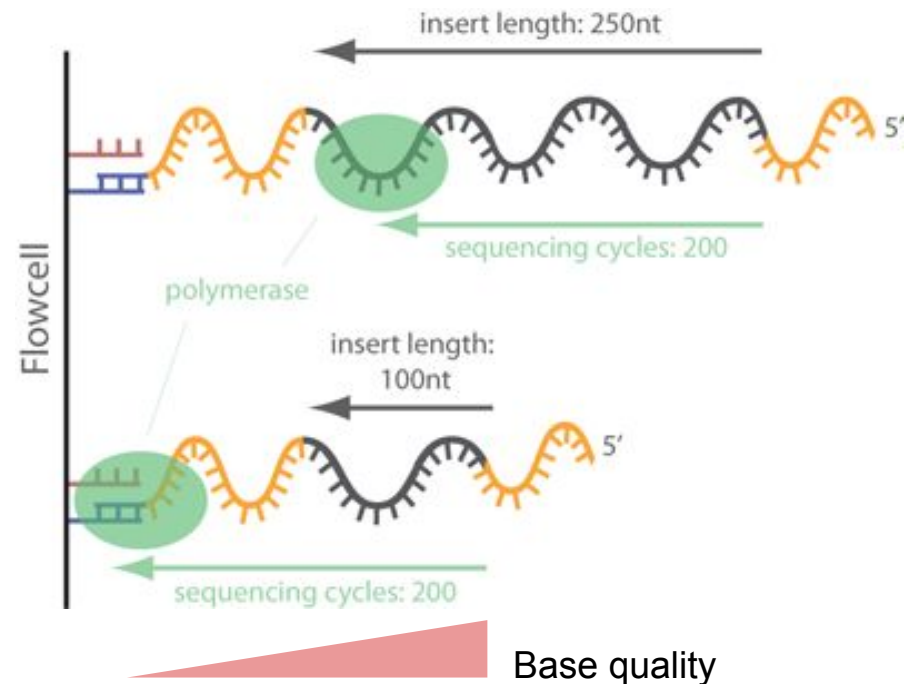




# Reads cleaning example

Tool: Trimmomatic





# Workflow

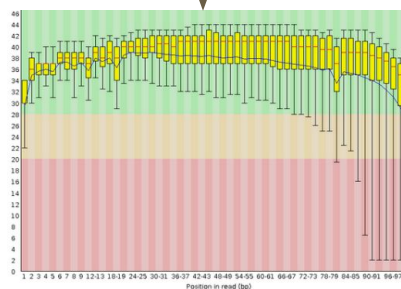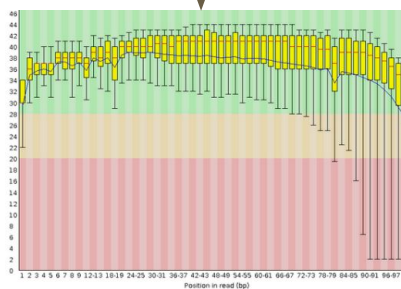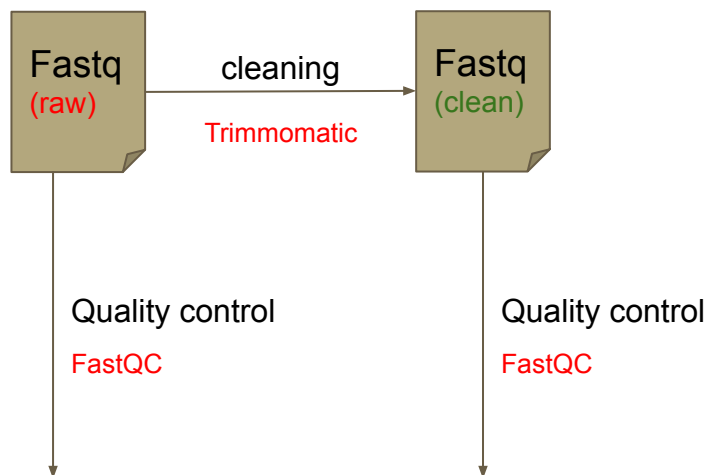

# usegalaxy.fr presentation



# Practical: Quality Control (QC) & Cleaning

Open Galaxy



Practical:

<https://training.galaxyproject.org/training-material/topics/sequence-analysis/tutorials/quality-control/tutorial.html>

TIAAS: <https://usegalaxy.fr/join-training/bililledna/>

# Mapping

# Practical: Mapping

Open Galaxy



Practical:

<https://training.galaxyproject.org/training-material/topics/sequence-analysis/tutorials/mapping/tutorial.html>

TIAAS: <https://usegalaxy.fr/join-training/bililledna/>